



# ZTE Whirl 2 Back Panel Replacement

How to replace the back panel on the ZTE Whirl 2.

Written By: Alana Rucks



---

## INTRODUCTION

Use this guide if you need to remove the back panel of your ZTE Whirl 2 (model Z667G). Removing the back panel allows you to access the phone's motherboard, camera, screen, and speaker. Before using this guide, check the [Troubleshooting Page](#) to see if you can find a solution to your phone's issue.

---

### TOOLS:

- [iFixit Opening Picks set of 6](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
-

## Step 1 — Battery



- Power off your phone before removing the battery.
- Pry the cover off the back of the phone using your fingers.

## Step 2




- Pry the battery from the phone using your fingers.

## Step 3 — Back Panel



- Remove four 4 mm screws using a Phillips #00 screwdriver.
- Use a tweezers to remove the lock sticker from the bottom right screw. Remove the 4 mm screw using a Phillips #00 screwdriver.

## Step 4

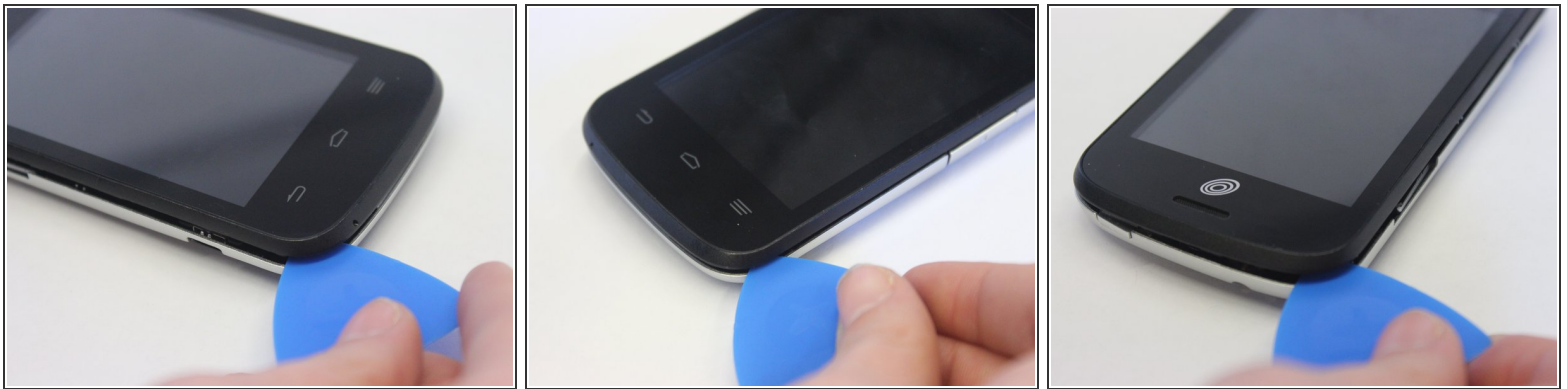

- Insert an opening pick between the midframe and the digitizer.
- Move the pick around the midframe to detach the midframe from the digitizer.
- ⓘ The lock button and volume buttons may fall out during this process.



## Step 5



- Remove the midframe from the digitizer.

To reassemble your device, follow these instructions in reverse order.