



# Samsung SGH-T639 Motherboard Replacement

This guide contains photos that do not include...

Written By: Yi Ren



# INTRODUCTION

This guide contains photos that do not include pictures of the back cover or battery. However, the instructions have been adjusted to reflect this lack of visual aid.

---

## TOOLS:

[iFixit Opening Tool](#) (1)

[Tweezers](#) (1)

[Phillips #000 Screwdriver](#) (1)

[Magnetic Project Mat](#) (1)

---

## Step 1 — Battery



- Flip the phone over and take off the back cover

 Note: These images do not contain the back cover or battery of the phone.

## Step 2



- Use button to remove battery from the phone.

**i** Note: These images do not contain the back cover or battery of the phone.

## Step 3 — SIM Card




- Locate SIM card
- Slide SIM card down and gently pull out of the card slot

## Step 4 — Motherboard



- Locate the six (4mm) screws on the back casing of the phone.
- Unscrew each one using a phillips head #000 screwdriver.
- Place screws on [magnetic mat](#).




## Step 5

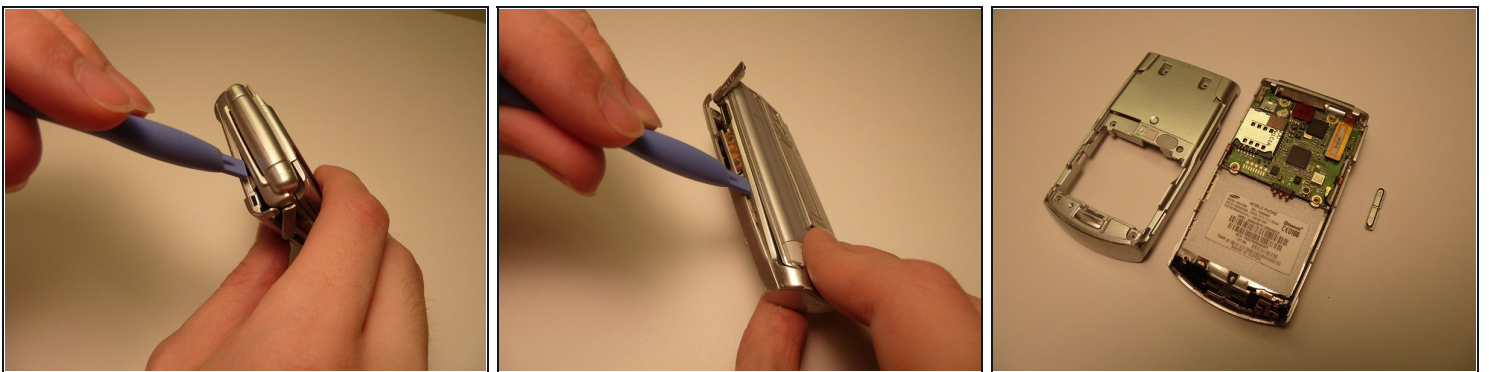

- Starting at the top of the phone, carefully insert plastic opening device into the seam.
- Carefully slide device along the seam and around the corners of the phone until the back is separated from the front.
- ① Note: Some force must be exerted. Be careful when taking off panel. Go slow.
- ① Note: The volume button may separate from the case, this is normal. It is not broken.





## Step 6

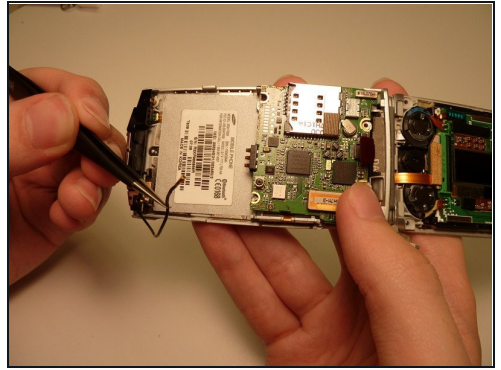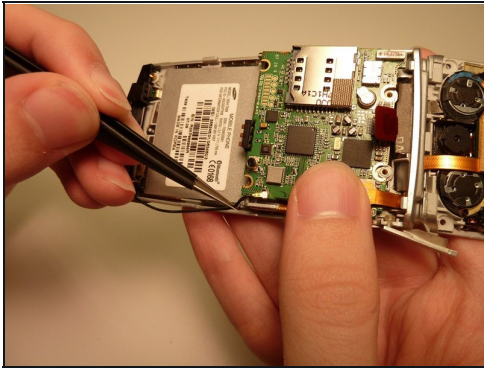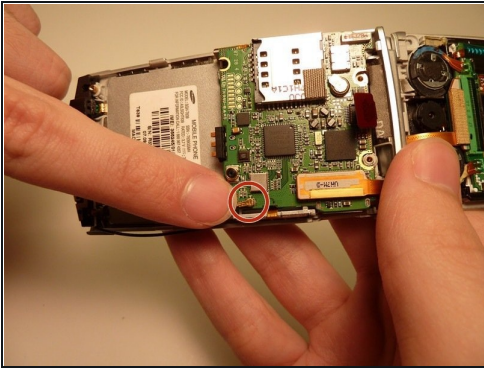




- Locate the connection point of black wire running from the microphone to the motherboard.
- Carefully disconnect the gold connector from the motherboard using [tweezers](#).

## Step 7

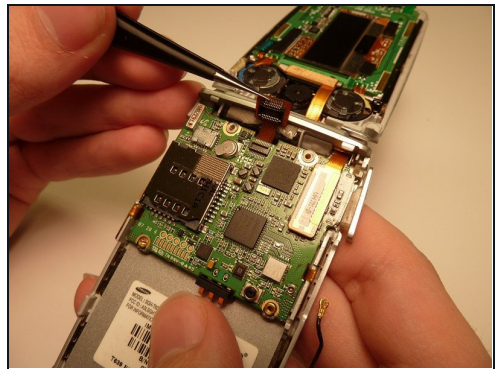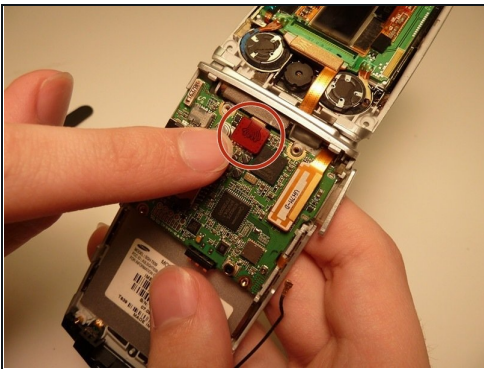



- Locate the red connector at the top of the motherboard.
- Carefully lift and remove the connector from the motherboard using tweezers.

## Step 8

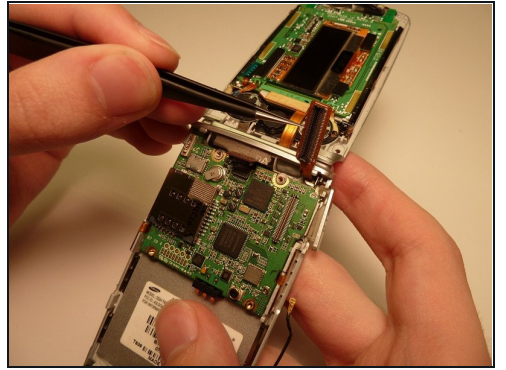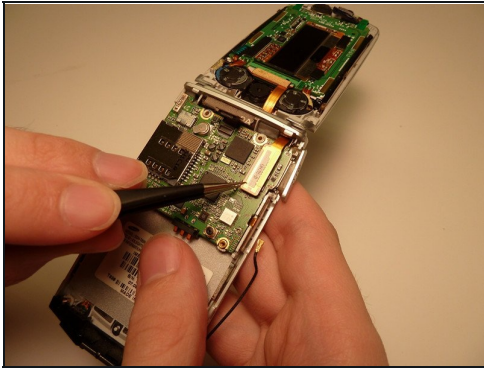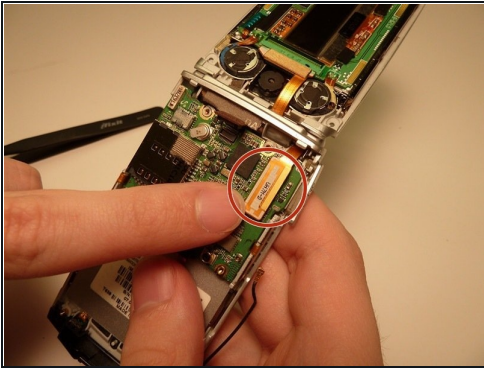


- Locate the gold connector that connects the screen to the motherboard.
- Carefully disconnect the connector from the motherboard using tweezers.

## Step 9

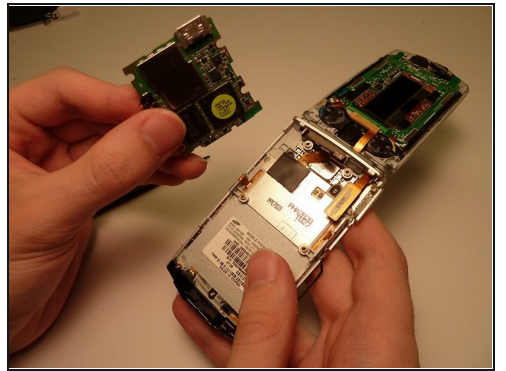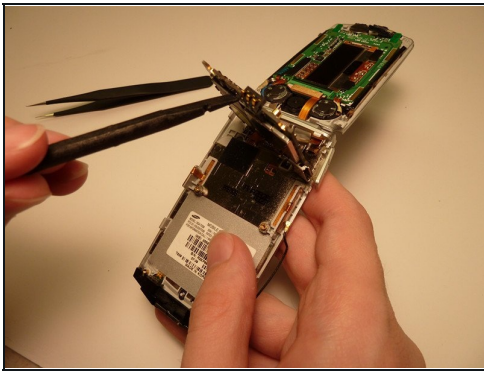

- Start at the bottom of the motherboard and gently pry it from the back of the cell phone using the plastic opening tool.
- Lift the motherboard from the cell phone.

## Step 10

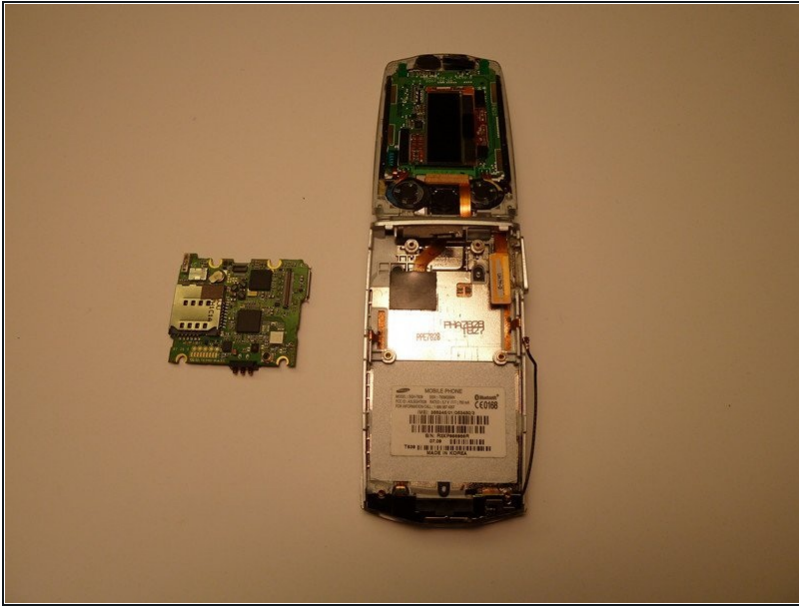

- Remove the motherboard from the cell phone.

---

To reassemble your device, follow these instructions in reverse order.