



Texas Instruments TI-83 Plus Back Case Replacement

This guide will help you replace the back case of the TI-83 Plus if it is broken.

Written By: Jared



INTRODUCTION

If your back case is cracked or broken this guide will show you how it is removed and replaced.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Backup Battery



- Remove the battery cover.
- Remove the AAA batteries from the calculator.

Step 2




- Remove the 5mm Philips #00 screw holding backup battery cover.
- Remove the backup battery cover.

Step 3



- Use plastic opening tool to remove the backup battery. Place the tool in the small cut-out next to the battery and pry the battery out.


 Be careful, the backup battery is spring loaded and may shoot up when you remove it.

Step 4 — Back Case



- Unscrew the six 7.5mm T6 screws on the back case. You will need to use a screwdriver with a long and skinny head.

Step 5

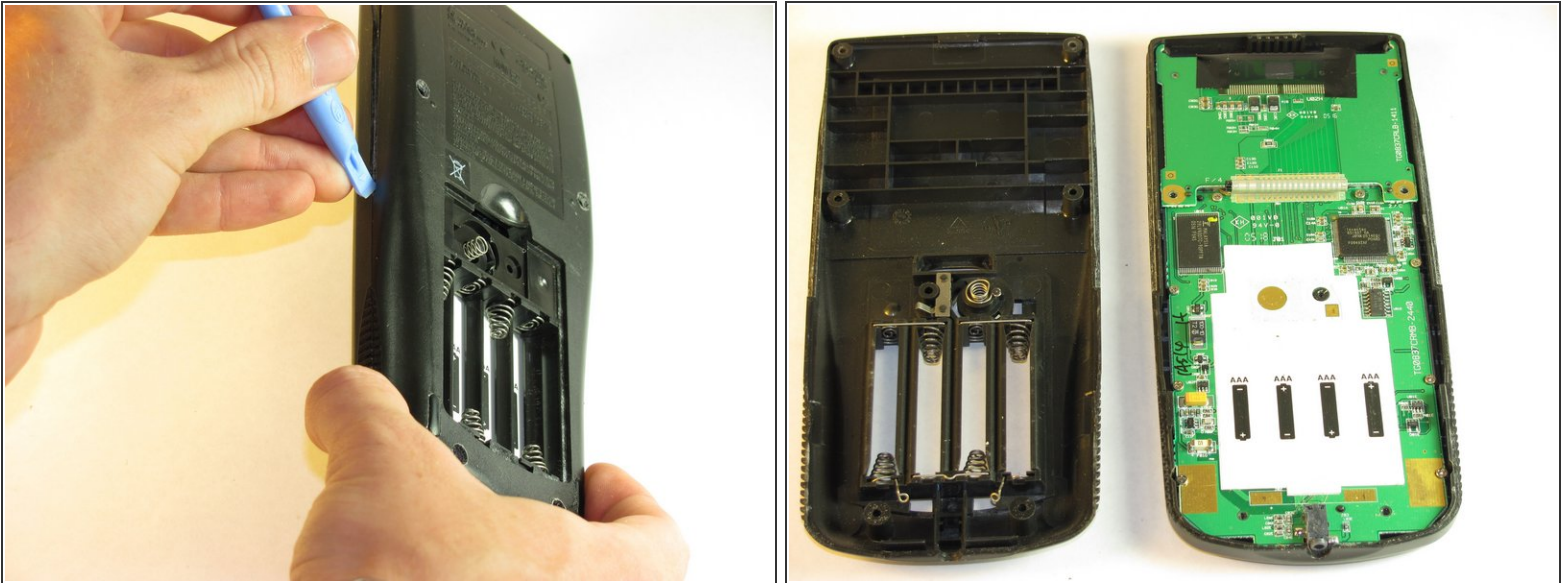

- Pry back case off. Insert the plastic opening tool in the track for the protective cover and pry the halves of the case apart.

To reassemble your device, follow these instructions in reverse order.