



HP Deskjet 1055 Ink Cartridge Replacement

This guide shows how to replace the ink cartridges in the printer when it runs out of ink.

Written By: Daniel



INTRODUCTION

Install the ink cartridge(s) when the printer runs out of ink or when the ink warning lights flash to prevent running out.



PARTS:

- [HP 61 Ink Cartridge\(s\) \(Black and/or Tri-Color\)](#) (1)
-

Step 1 — Ink Cartridge



- Turn on the printer by pressing the power button.

Step 2



- Place your index finger in the opening on the front of the printer (right side below scanner/copier) and pull the door down.
- Pull down on the tab that lies in the middle of the newly-exposed gray cover.

Step 3




- ⓘ The tri-color cartridge sits on the left side; the black cartridge sits on the right.
- Grab the cartridge from the top and bottom and pull down until it clicks.
- Pull out the freed cartridge.

Step 4



- Take the replacement cartridge out of its packaging and pull off the plastic tab.
- ⚠ Do not touch the electrical contacts or ink nozzles. Touching may cause malfunctions.
- ⓘ Hold the cartridge on both sides with the title sticker facing upwards.

Step 5

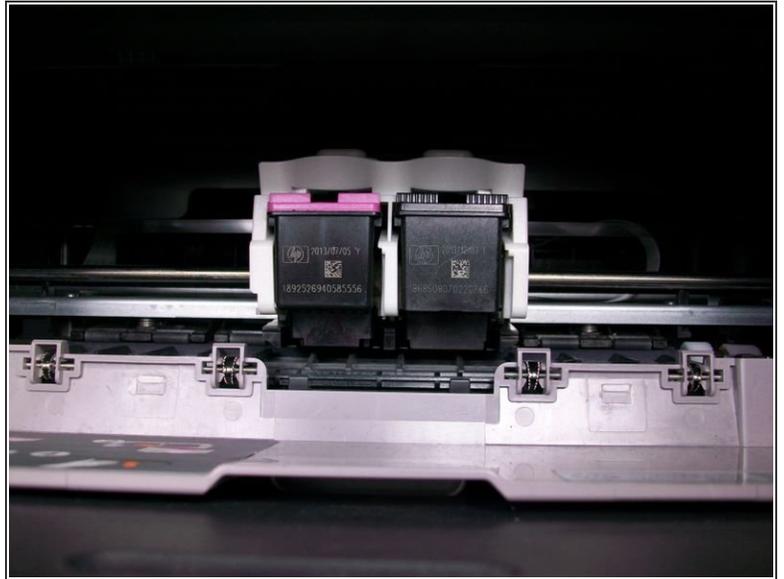

- Slide the cartridge directly into open slot (tri-color on the left, black on the right).
- Push it forward until you hear it snap.

Step 6



- Close the gray access door.

Step 7



- ⓘ Wait 30 seconds for the alignment page to print.
- Open up the scanner lid and place the alignment page face-down in the right-front corner of the glass.
- Close the lid.

Step 8



- Press the color copy button to begin scan.
- ⓘ Wait until the power button stops blinking.

When the power button stops blinking, you can now use your printer.