




HP Pavilion dv7-4285dx Keyboard Replacement

How to replace the keyboard for a HP Pavilion dv7-4285dx.

Written By: Austin Sandel

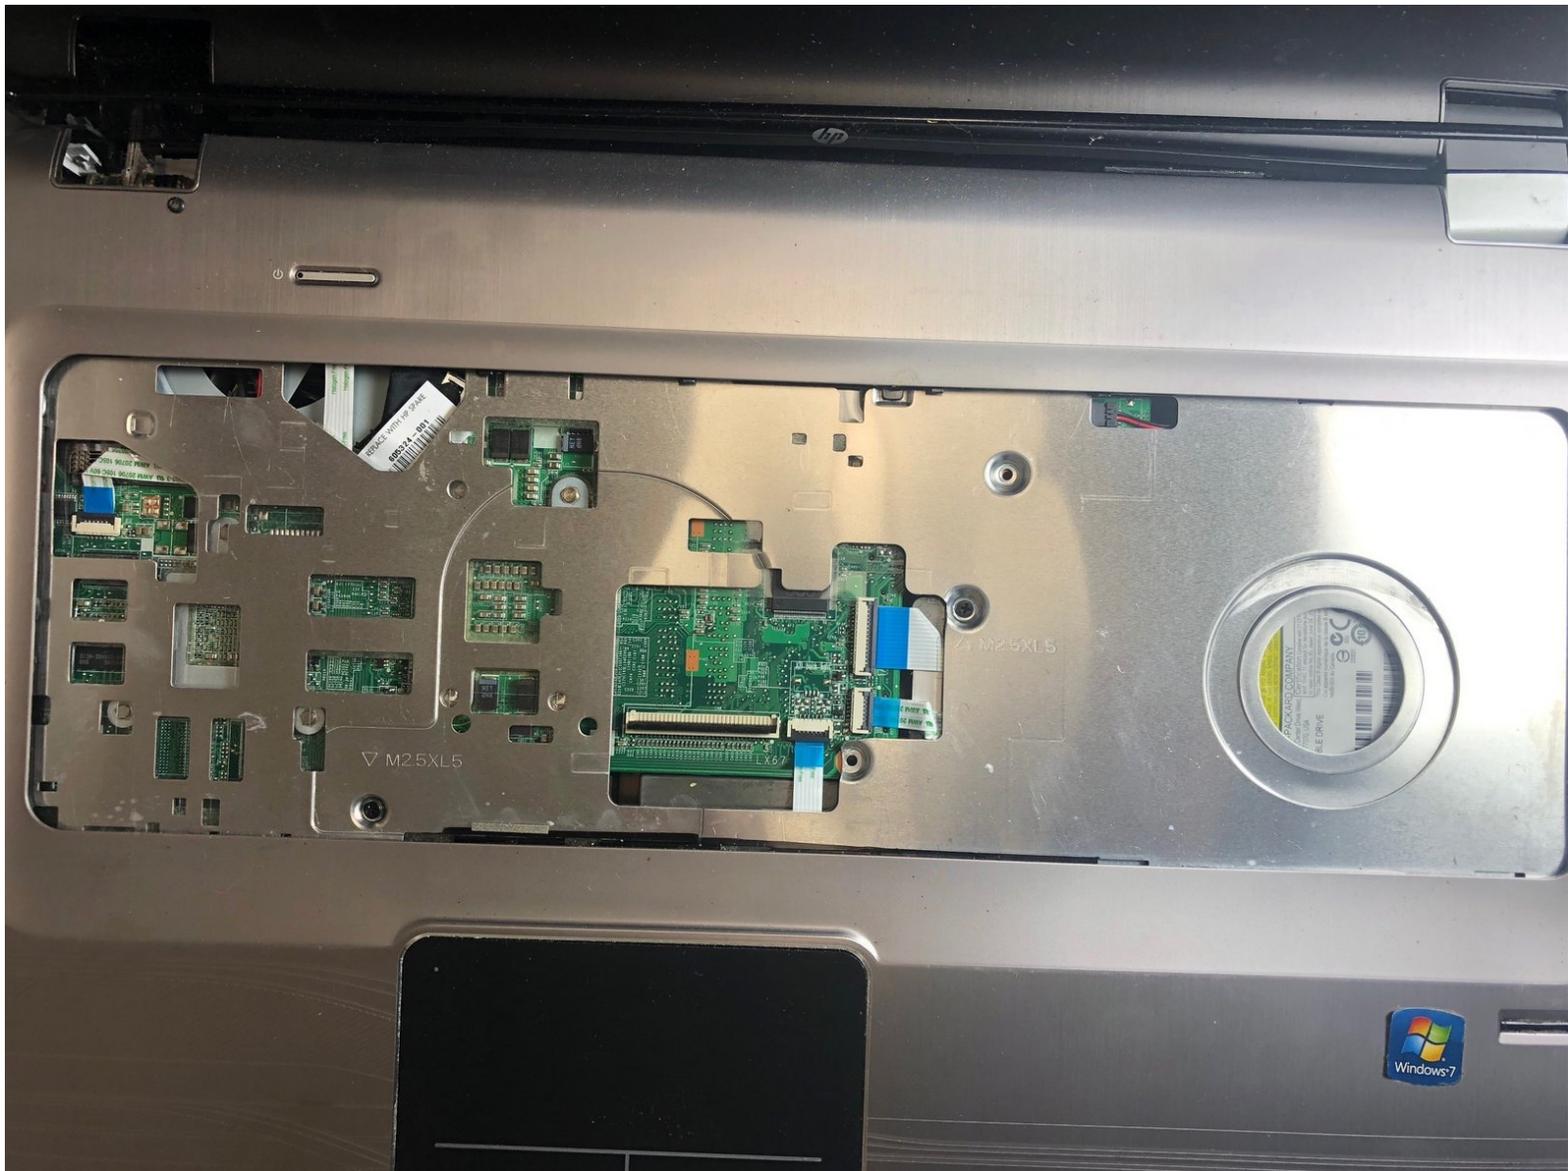


INTRODUCTION

This guide will describe the replacement of the keyboard of the HP Pavilion dv7-4285dx

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
 - [Metal Spudger](#) (1)
-

Step 1 — Battery

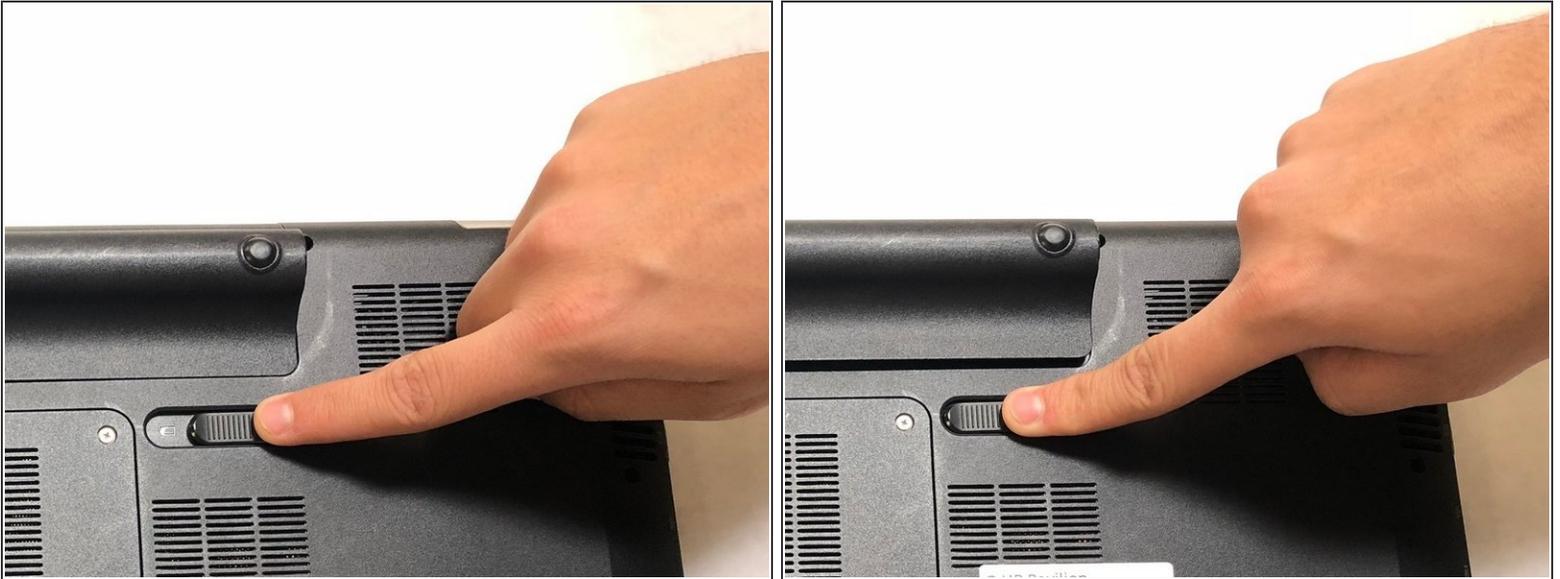

- Slide the battery release switch to the left. The battery pack will then subsequently release.

Step 2



- Remove the battery pack from the socket.

Step 3 — Keyboard




- Unscrew the 5 black plate screws using a Ph#0 screwdriver.
- ⓘ During the removal process, the back plate will retain the 5 back plate screws.
- Use a metal spudger to carefully remove back plate.

Step 4





- Unscrew the 7.2mm screws using a Ph#0 screwdriver.

Step 5

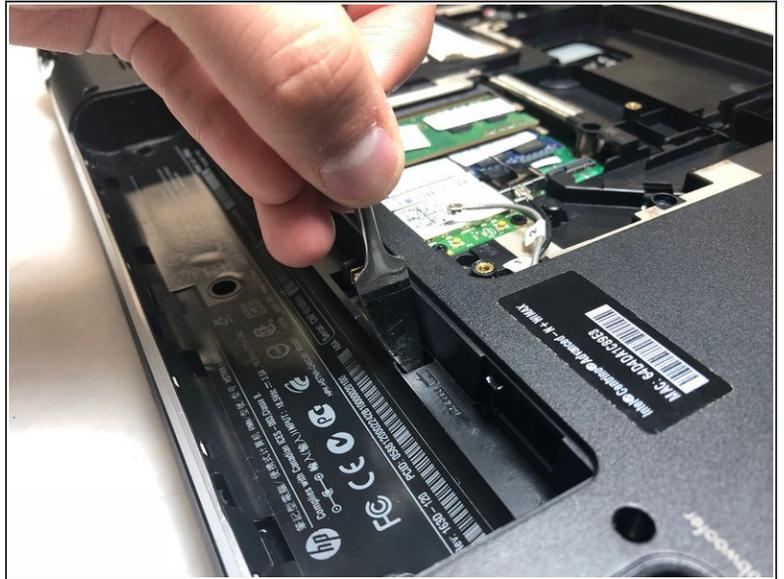


- Push the keyboard release switch using the metal spudger.

Step 6

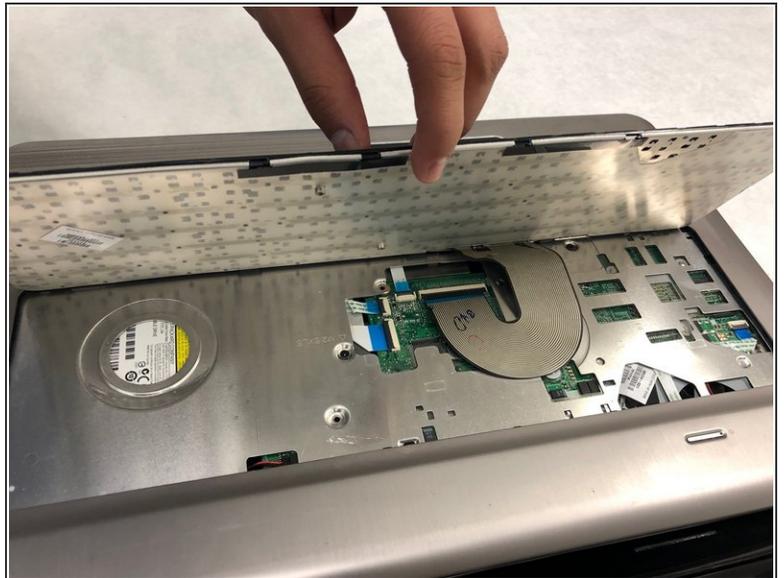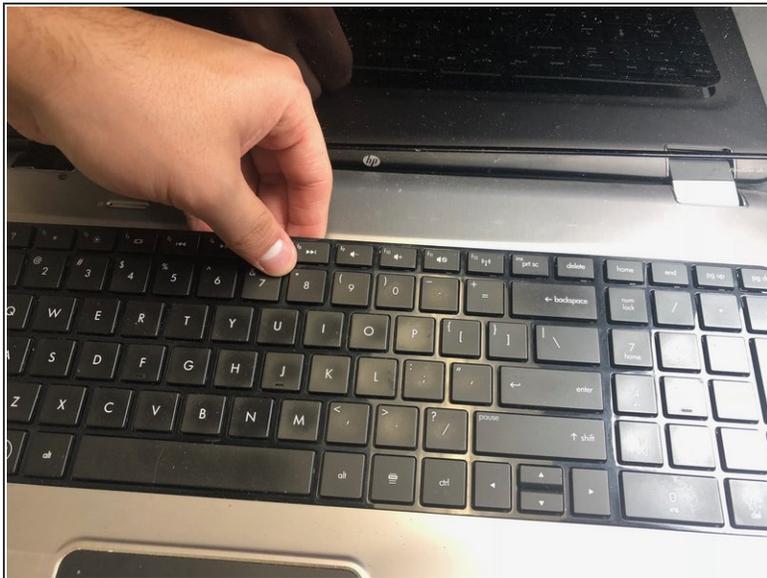

- Lift up keyboard from its resting position.


Step 7

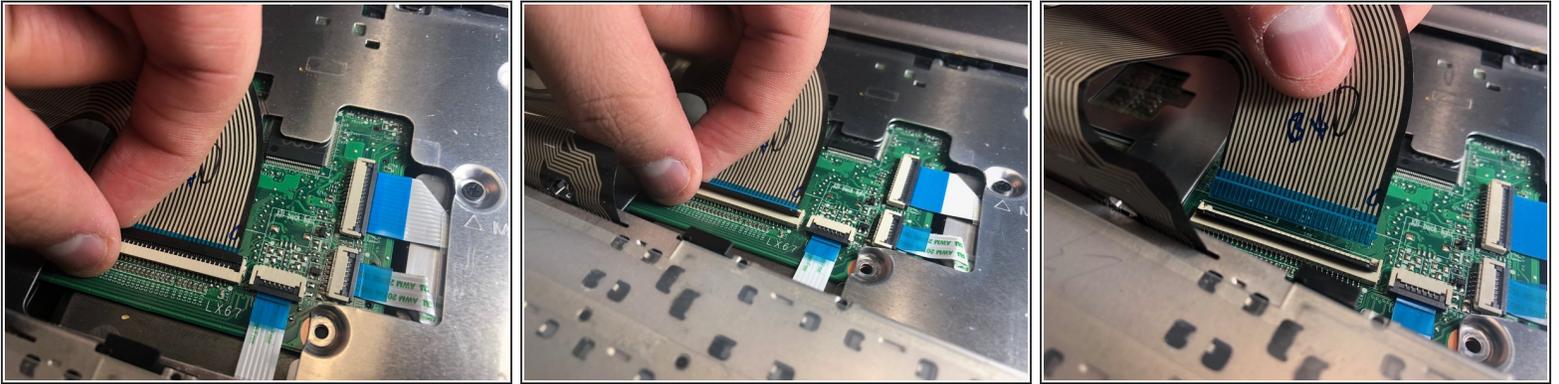

- Lift up black tab holding ribbon cable.

⚠ Remove ribbon cable from motherboard.

Step 8

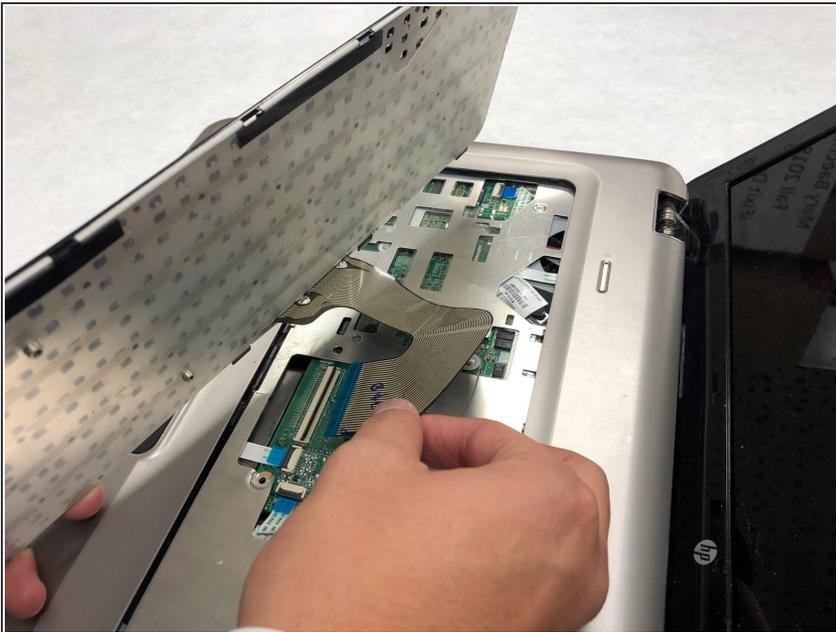

- Remove keyboard.

To reassemble your device, follow these instructions in reverse order.