




HTC Desire 530 Battery Replacement

This guide is meant to show you the steps...

Written By: Alyssa

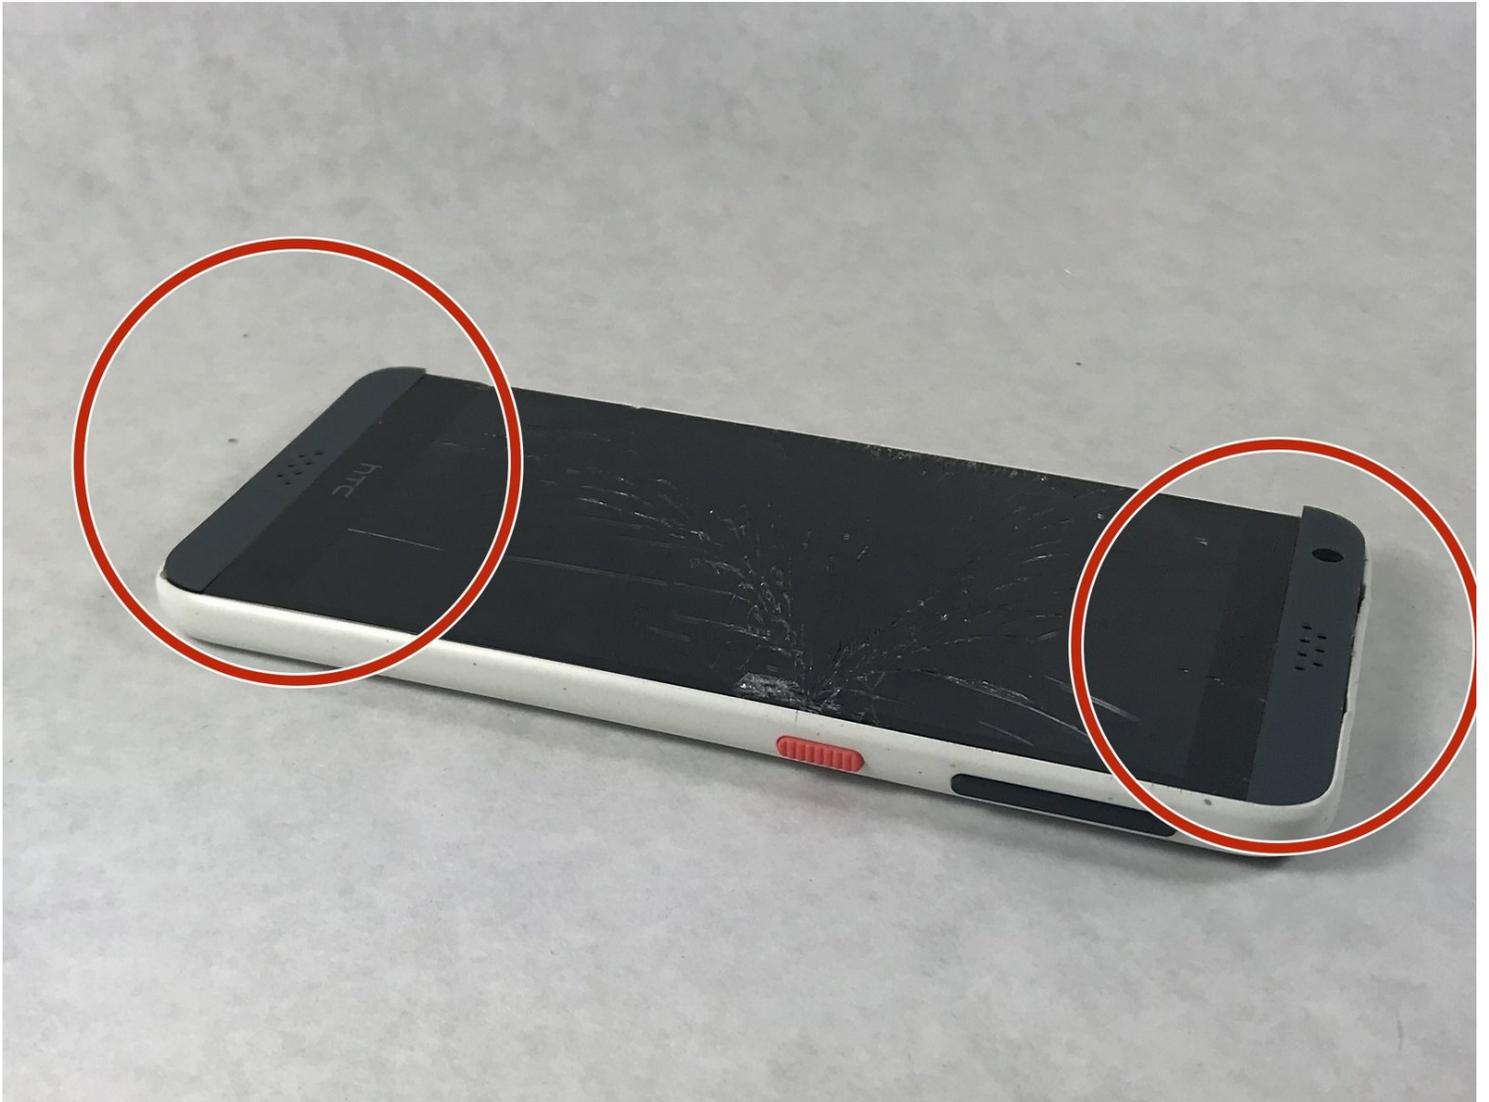

INTRODUCTION

This guide is meant to show you the steps required towards replacing or removing the battery from the HTC Desire 530. This is not a skillful task and anybody should be able to complete it with the right tools within a short amount of time. Battery replacement is a common issue within most smartphones and a new one will prolong your battery life, or if the device is not turning on, a battery replacement may be necessary


TOOLS:

[iFixit Opening Tool](#) (1)
[T5 Torx Screwdriver](#) (1)
[Spudger](#) (1)

PARTS:


[35H00257-02M](#) (1)

Step 1 — Battery

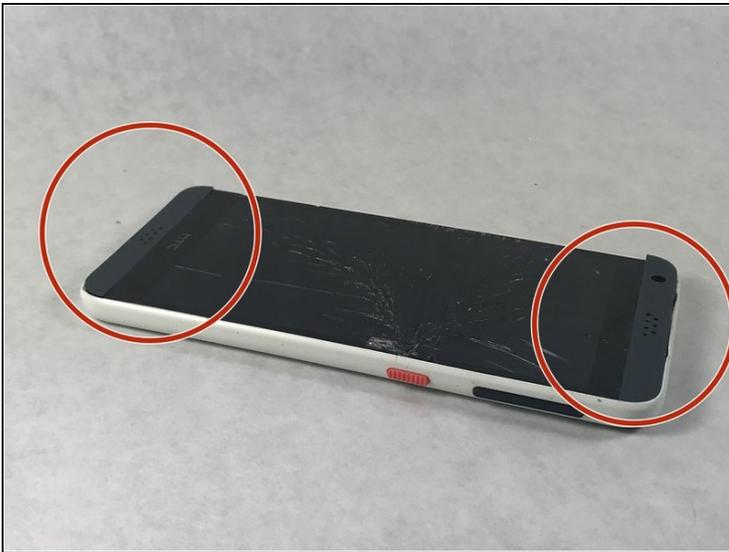



- Use the plastic opening tools to remove the plastic speaker covers that are attached through an adhesive layer.
- ⓘ They may be difficult to peel off and you might want to consider loosening the adhesive layer by running a hair dryer or a heat gun over it briefly to allow them to peel off easily.

Step 2

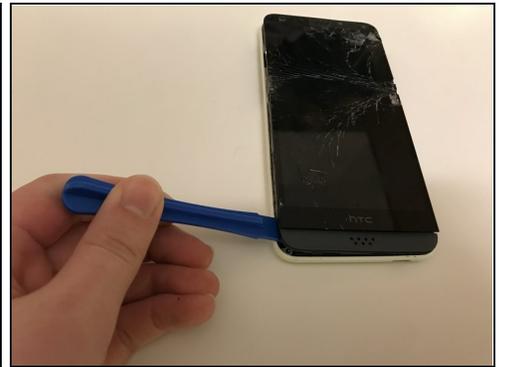


- Use the T5 Torx screwdriver to remove the four screws in each corner.
- Make sure to take out any SD cards, located on the left side of the phone before proceeding to the next step.
- Use the plastic opening tool to pry the front of the device off. Fully go around the front with the plastic opening tool before attempting to pull it off.

Step 3

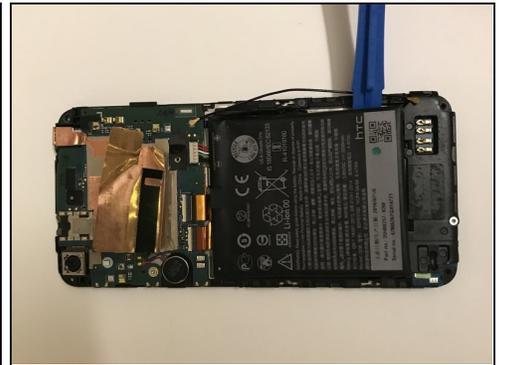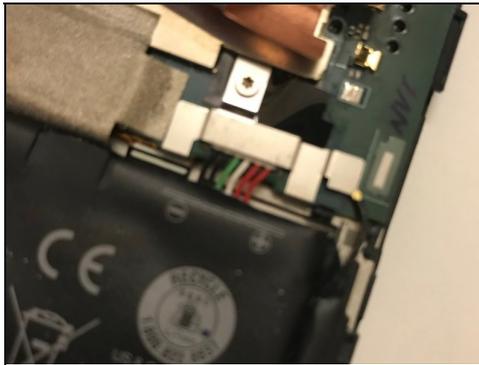

- Dislocate the small piece with the wires connected using a nylon spudger.
- Loosen the adhesive layer for the battery by running a hair dryer over it briefly. After the adhesive is loosened you can pry the battery out with a plastic opening tool.

Step 4

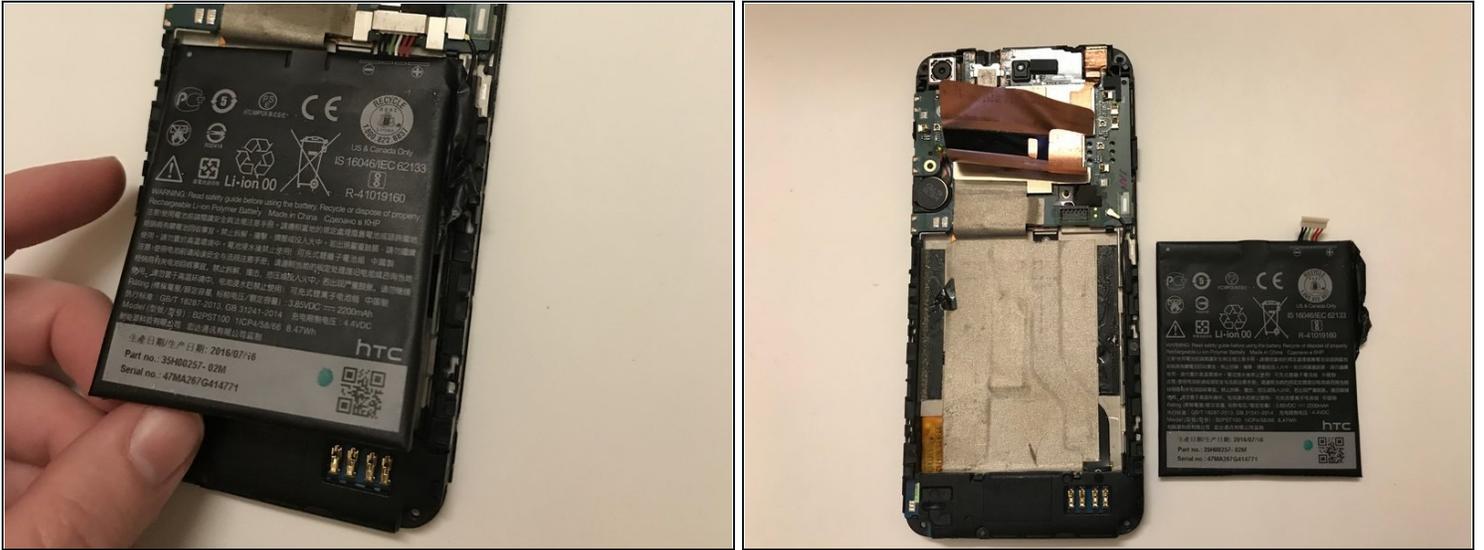

- After prying, simply lift the battery up and out of the device.

To reassemble your device, follow these instructions in reverse order.