



# ZTE Blade X Max Front Camera Replacement

How to replace the front camera of a ZTE Blade X Max.

Written By: Celeste Holmes



---

## INTRODUCTION

If the front camera of your ZTE Blade X Max is not functioning—blurry image, scratched lens—and you have already been through our [troubleshooting guide](#), you will have to replace it.

This guide requires removing the back of the phone. You will have to use heating products to complete this guide. If you are using the iFixit iOpener, or a heating pad, be sure to follow the [instructions](#) for that particular product.

---

### TOOLS:

- [Jimmy](#) (1)
  - [iOpener](#) (1)
  - [Tweezers - Pro/ESD/Angled](#) (1)
  - [Phillips #000 Screwdriver](#) (1)
-

## Step 1 — Back Cover



- Use the iOpener or heating pad to heat around the edges of the phone to melt the adhesive.
- ⓘ It will take about ten minutes for the adhesive to be heated enough to remove the backing.
- ⓘ You will have to reheat the iOpener or heating pad a few times.

## Step 2




- Slide the Jimmy along the under backing and lightly push the plastic up.
- ⓘ You will hear a snapping sound as you slide the Jimmy along the backing. This is from the closures releasing. There should be seven total closures on either side of the device, and three on the top and bottom.

### Step 3




- Carefully remove the backing from the phone once the closures are released.
- ⓘ If you do not open all of the closures on the backing **do not** attempt to pry it off.
- ⚠ Be careful when opening the back of the phone. The fingerprint scanner is connected by a thin film that will tear if pulled too roughly.

### Step 4

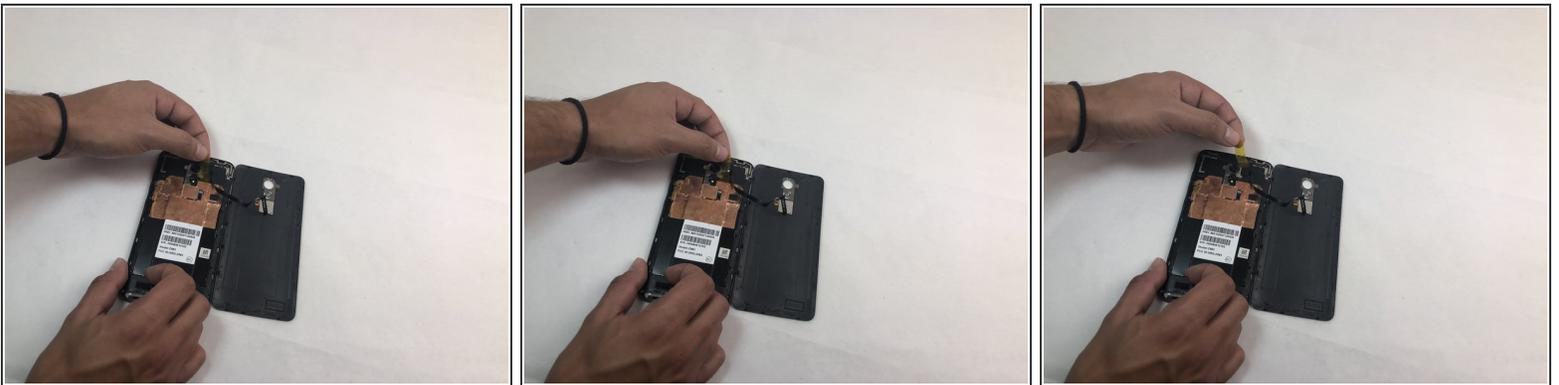


- Remove the opaque yellow sticker that indicates where the fingerprint scanner is connected to the back of the device.

## Step 5

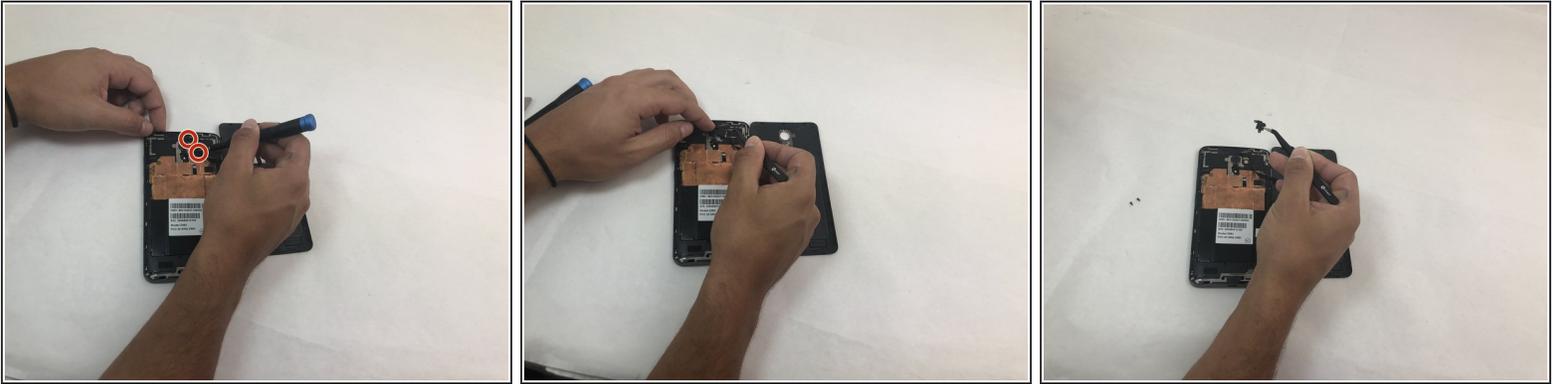


- Remove the two 1mm Phillips #000 screws on the small panel that was underneath the sticker.
- Use the tweezers to remove the panel.

## Step 6

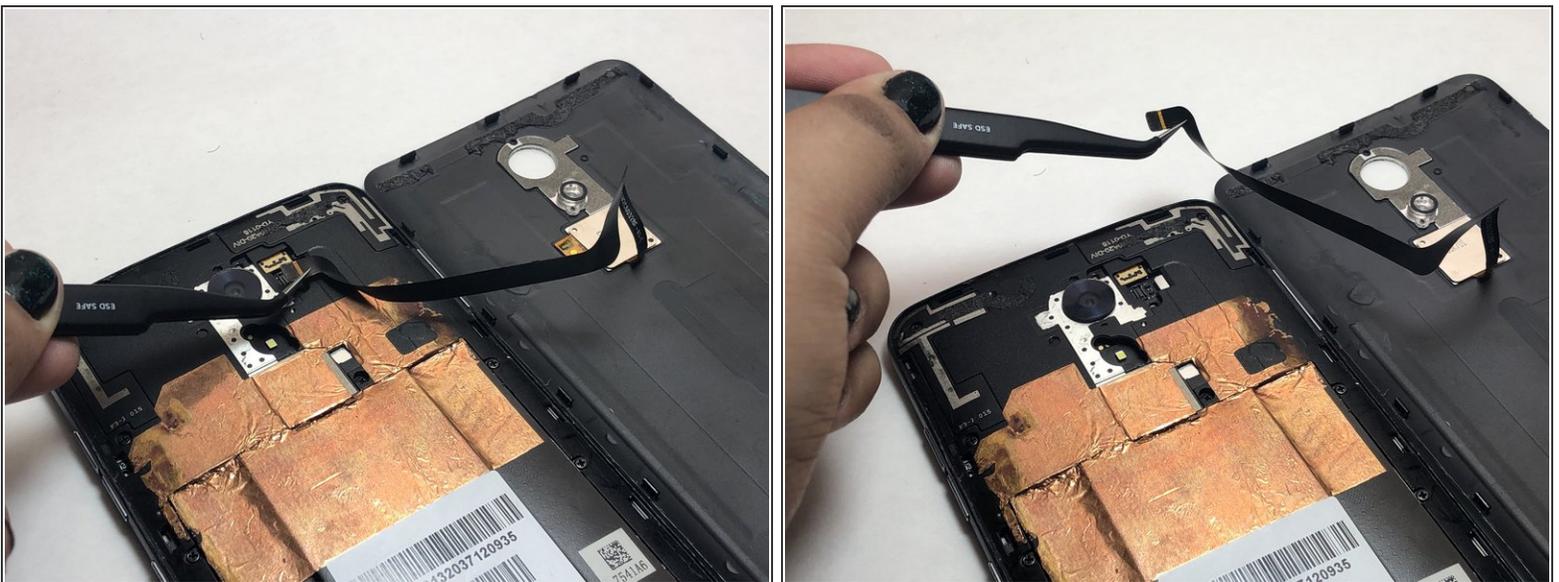

- Use the tweezers to pull at the base of the film to remove the fingerprint scanner.

## Step 7 — Midframe

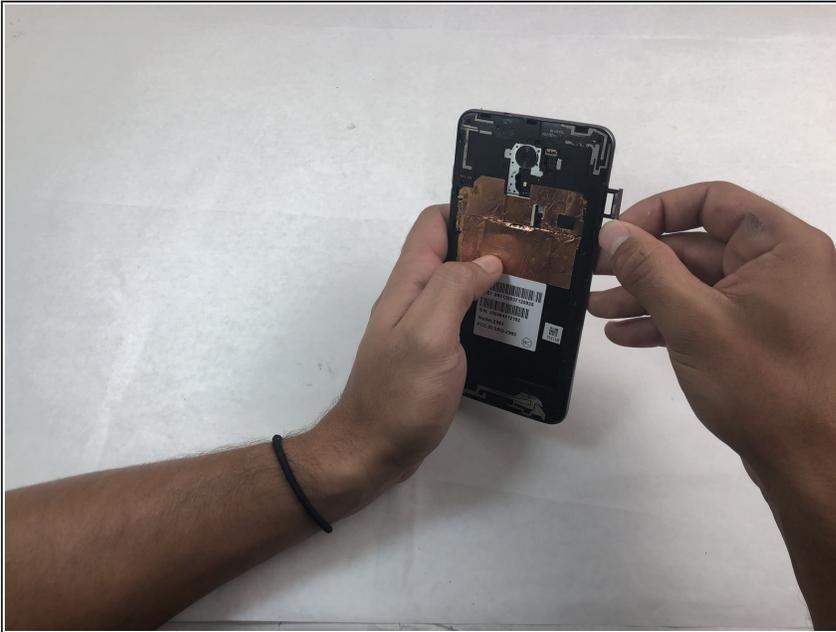

- Remove the SD and SIM cards by pulling out the card tray from the slot on the right side of the device.

## Step 8



- Remove the sixteen 1mm Phillips #000 screws from the midframe of the phone.

## Step 9



- Use the Jimmy to remove the midframe from the device.

## Step 10 — Front Camera



- Once the motherboard is exposed, locate the front camera connection in the top right corner of the motherboard.
- Use the tweezers to remove the front camera.

To reassemble your device, follow these instructions in reverse order.