




Nokia Lumia 900 Front Camera Replacement

A guide for removing the front camera of your Nokia Lumia 900 Windows Phone.

Written By: Kourtney Collier

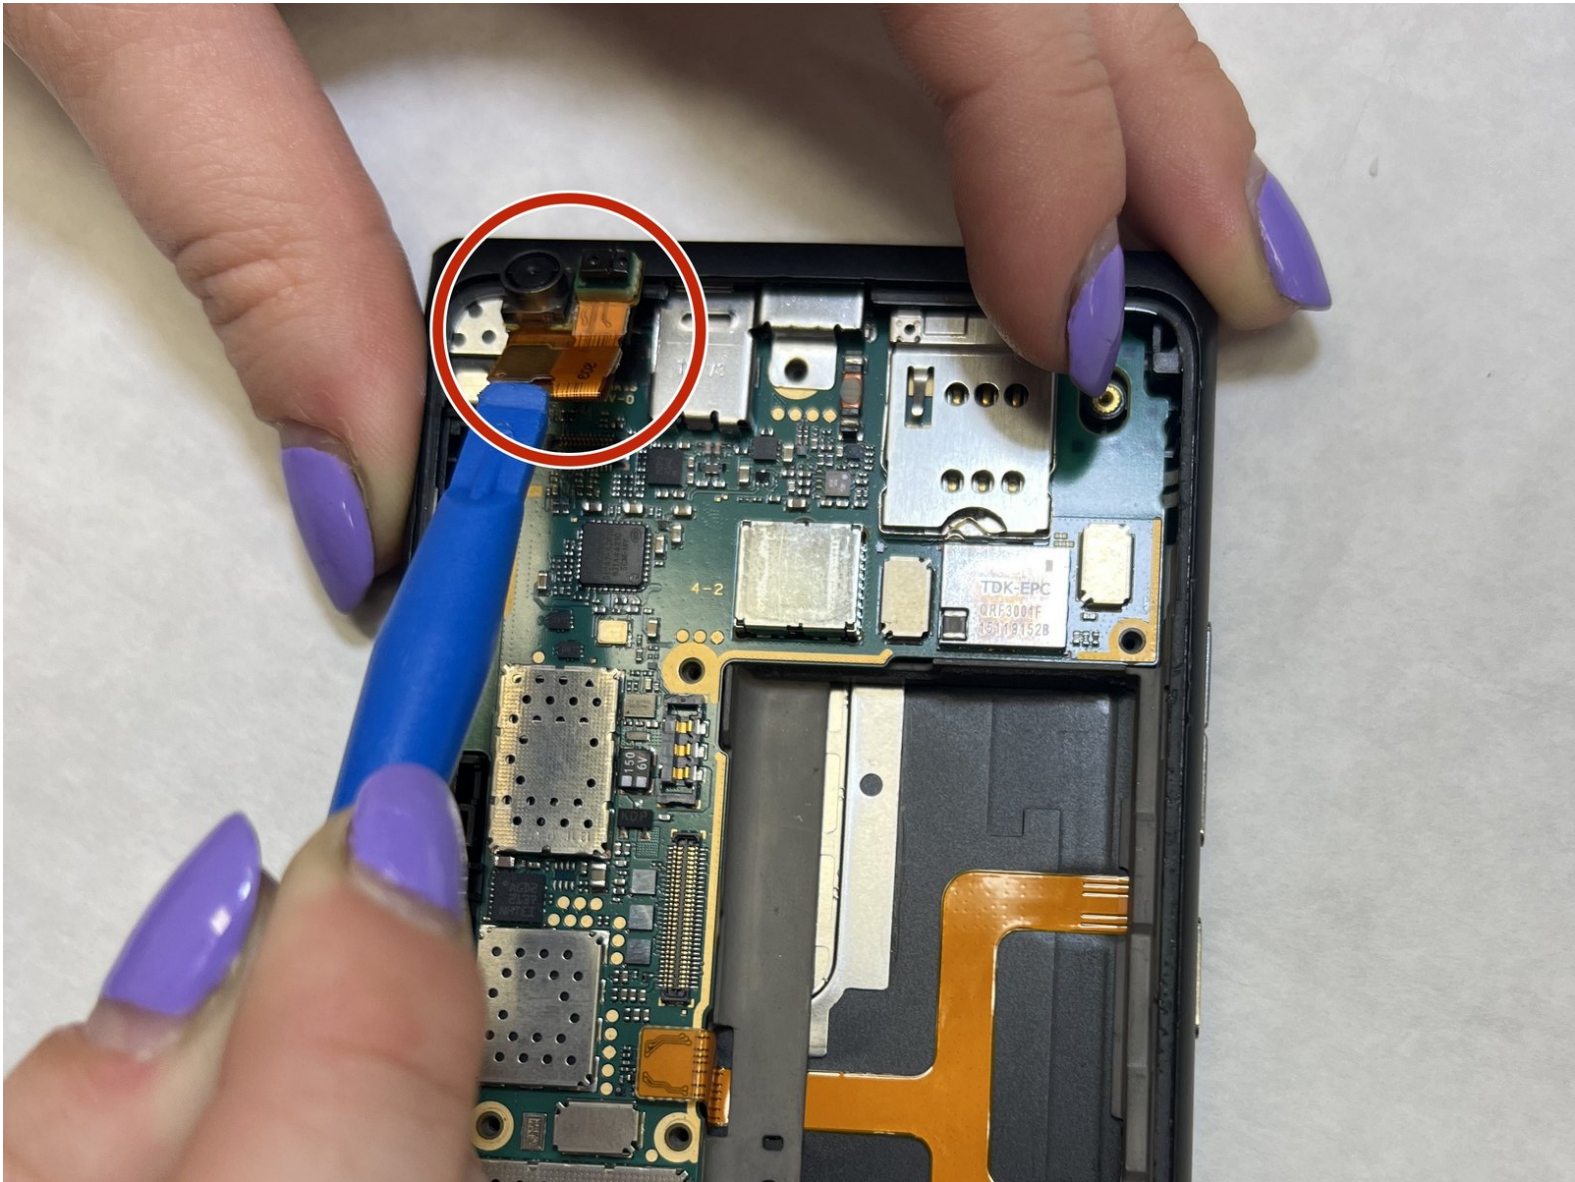

INTRODUCTION

The front camera is an integral part of the Nokia Lumia 900. Because it is a small and delicate component, this guide will show how to remove it carefully and properly.

TOOLS:



- [Suction Handle](#) (1)
 - [Spudger](#) (1)
 - [Tweezers](#) (1)
 - [iOpener](#) (1)
 - [iFixit Opening Tool](#) (1)
-

Step 1 — Screen




- Insert the pointed end of the spudger into the sim card port indicated by the picture. Then proceed to remove the sim card port entirely.

Step 2

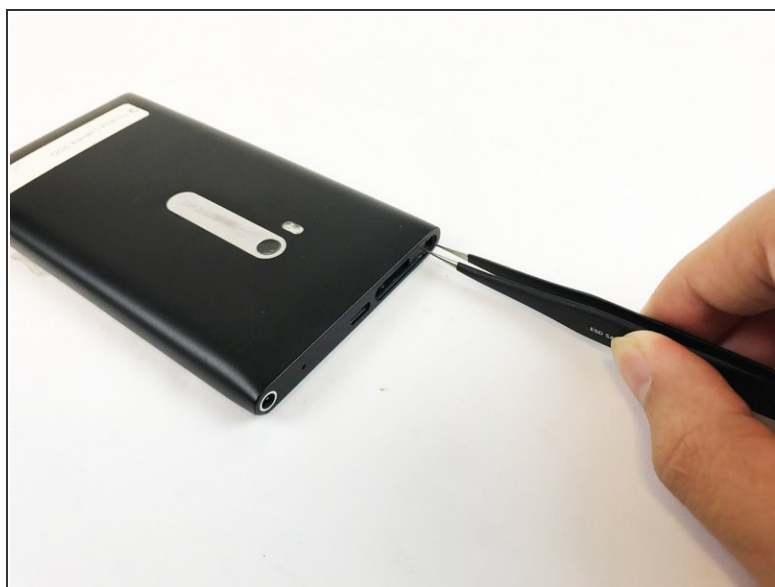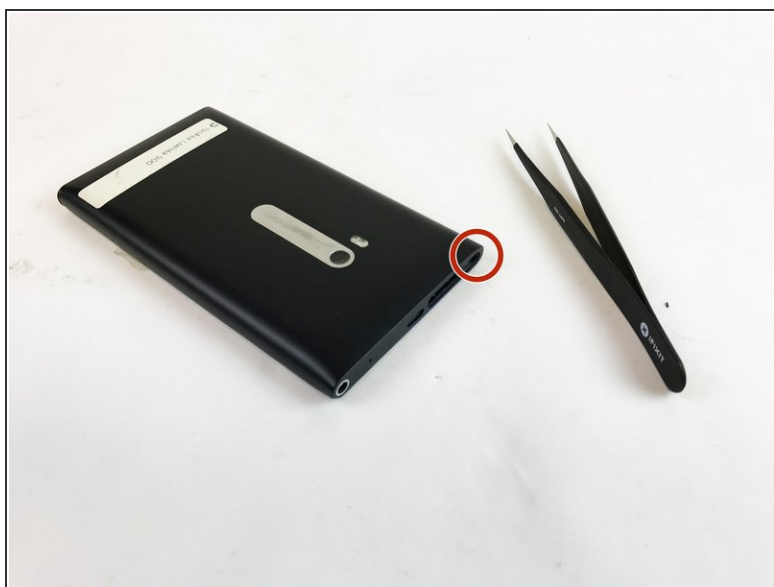



- Use tweezers to remove the small rod in the port indicated in the picture.

Step 3

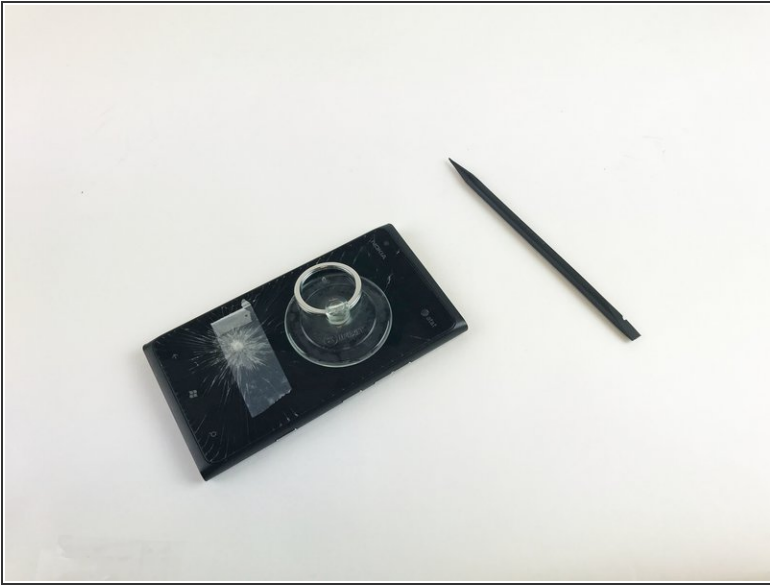


- Separate the screen from the motherboard by prying it open with the spudger along with pulling upwards with the suction cup.

Step 4

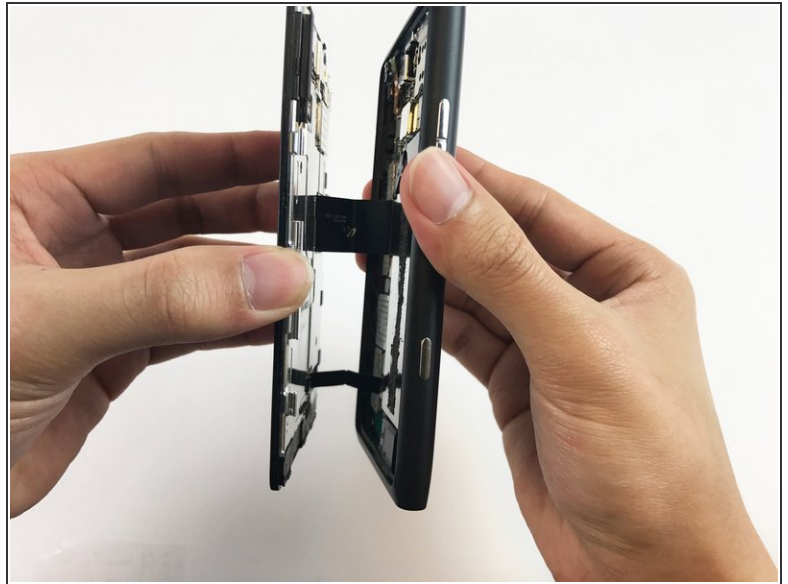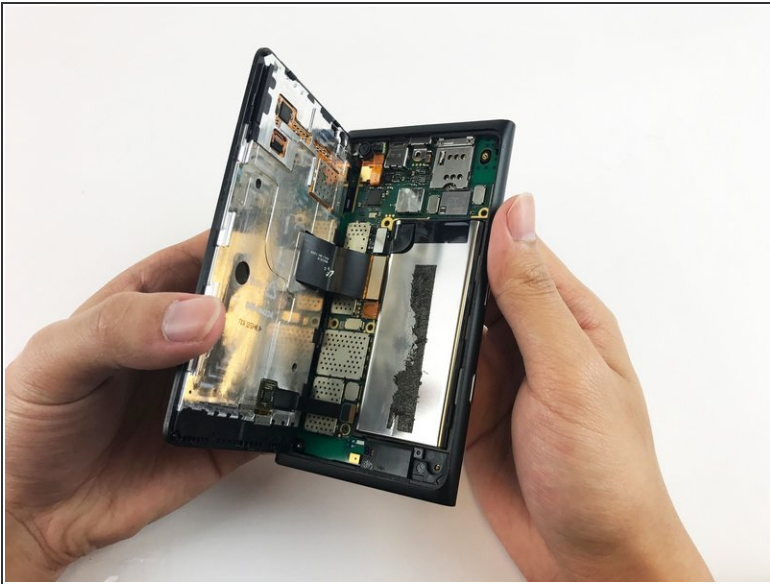



- Gently pull apart the screen from the motherboard, with only the ribbons connected from the motherboard to the screen.

Step 5

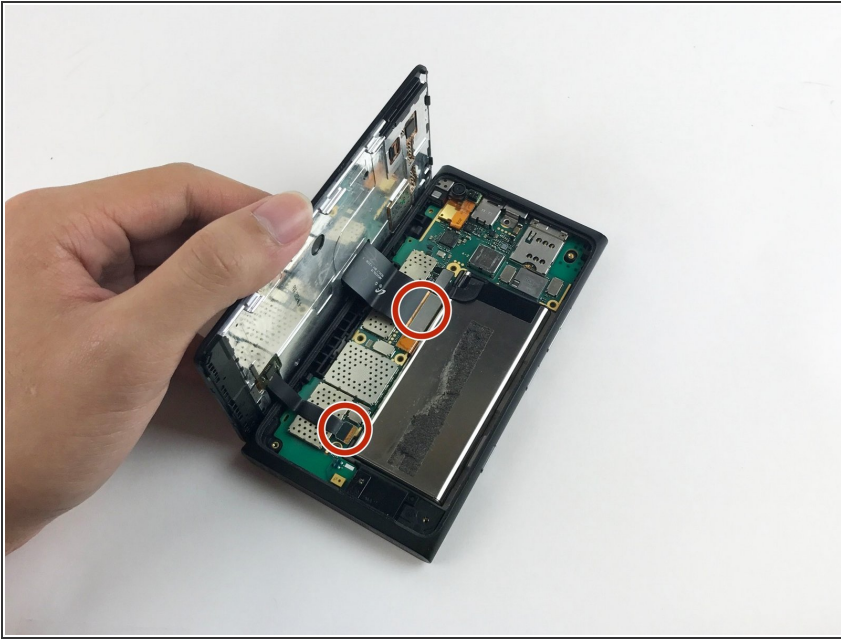

- Disconnect the No-fuss cables from the motherboard by gently prying them up using the flat end of the black stick spudger. Make sure not to bend or crease the cable.
- Remove the screen.

Step 6 — Front Camera

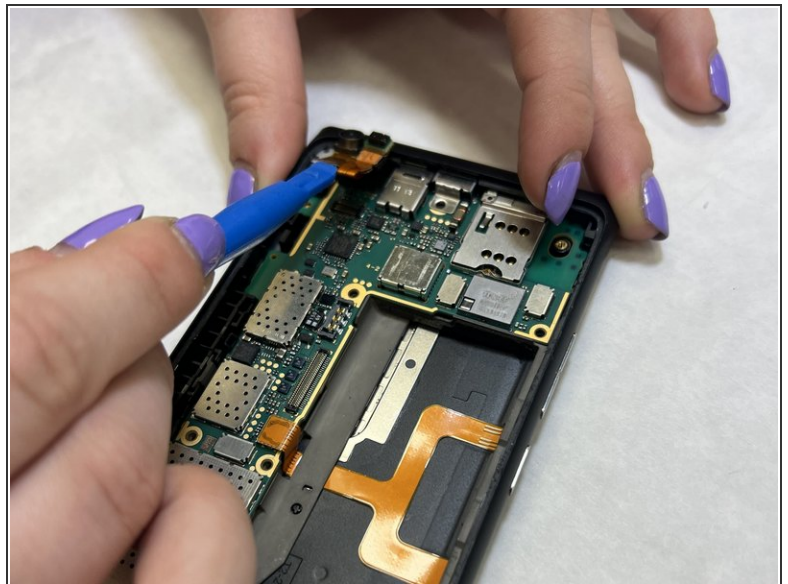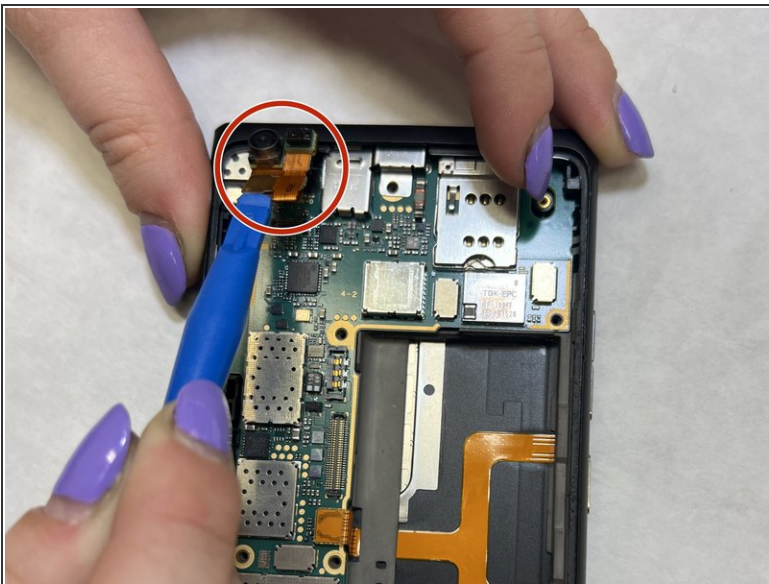

- Use the iFixit iOpener or another heat source to gently heat the top left corner until the adhesive under the camera softens.
- Use the plastic opening tools to carefully lift the front camera from the motherboard.

To reassemble your device, follow these instructions in reverse order.