

iPhone 3GS SIM Card Replacement

Written By: Ben Eisenman



INTRODUCTION

How to remove the SIM card.


TOOLS:	PARTS:
 SIM Card Eject Tool (1) 	 iPhone 3G and 3GS SIM Tray (1)

Step 1 — SIM Card



- (i) Apple includes a "SIM eject tool" with the iPhone 3G. If you don't have this tool, don't worry, an ordinary paperclip works just as well.
 - Insert your SIM eject tool or a paper clip into the hole next to the headphone jack.
- Press down on the tool until the SIM card tray pops out.

Step 2

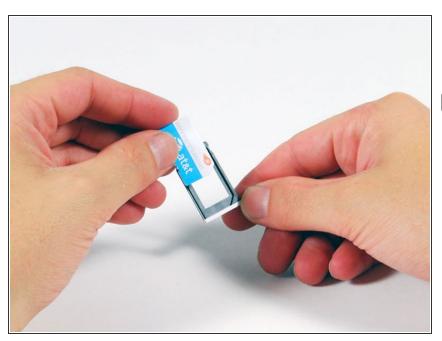

- Remove the SIM card from the SIM card tray.
- The cut-off corner should make it easy to reinstall the SIM card in the correct orientation.

To reassemble your device, follow these instructions in reverse order.