



# Blackberry 7520 LCD Screen Replacement

Written By: Nathan



---

## INTRODUCTION

If you are removing or replacing the Blackberry 7520 LCD screen, look here for support.

---

### TOOLS:

- [T6 Torx Screwdriver](#) (1)
  - [iFixit Opening Tool](#) (1)
-

## Step 1 — Battery



- Turn the phone upside down.
- Push down on the black button on the back of the phone to slide the rear panel off.
- The battery should be visible now.

## Step 2



- Hold the BlackBerry in one hand face-up with the screen facing towards you.
- ⓘ **Gently** smack the phone against your hand to dislodge the battery.

### Step 3 — Motherboard



- Use a T6 Torx screwdriver to remove the 6 screws holding the rear of the phone.

### Step 4



- Use a pick or plastic opening tool to push the clips holding the rear away from you.

**⚠** Applying too much pressure could break the plastic clips and permanently damage your BlackBerry.

## Step 5




- Repeat the process of unlatching the clips for the top section of the BlackBerry.

## Step 6



- Slide the rear panel forward to reveal the motherboard.

## Step 7

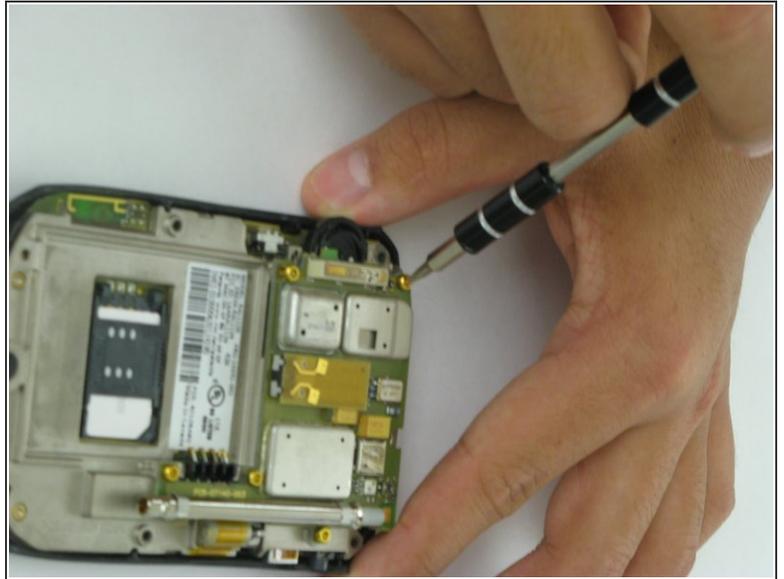


- Remove the indicated screws using a T6 Torx screwdriver.

## Step 8



- Remove the motherboard.
- Remove the indicated screw using the T6 Torx screwdriver.

## Step 9

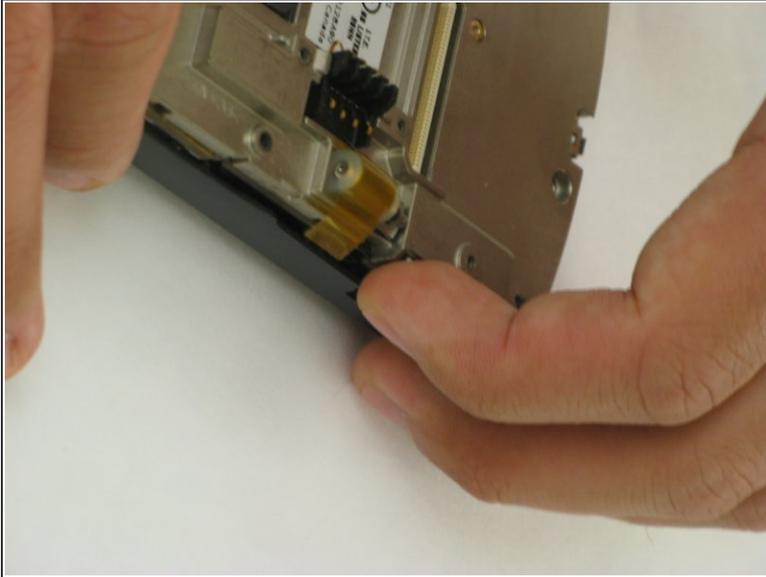

- Pull the metal plate away from the front panel of the cell phone.

## Step 10




- Place the faceplate face-down and the interior of the phone face-up, as shown.

## Step 11 — LCD Screen




- Turn the phone so that it faces towards you.

## Step 12

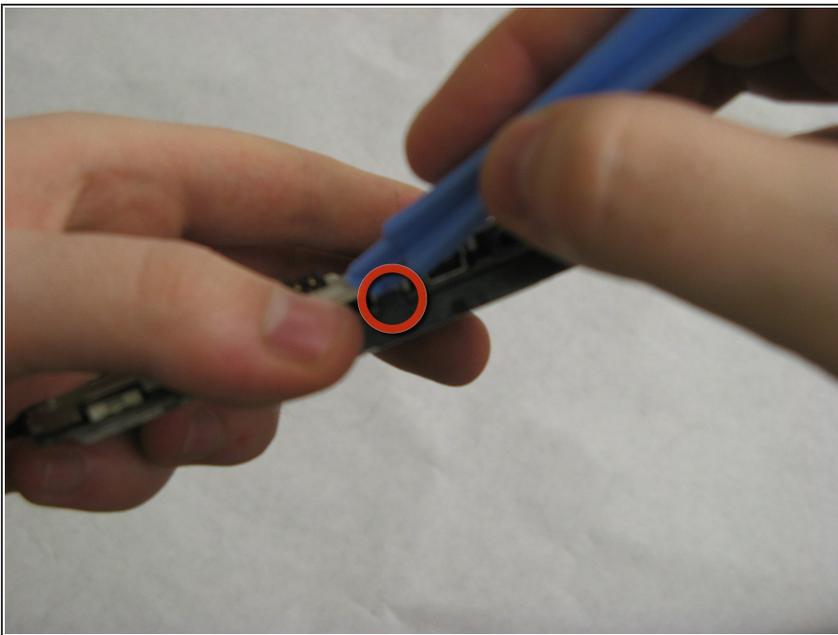

- Use a pick or other small tool to pop the small plastic clip holding the LCD panel on

## Step 13

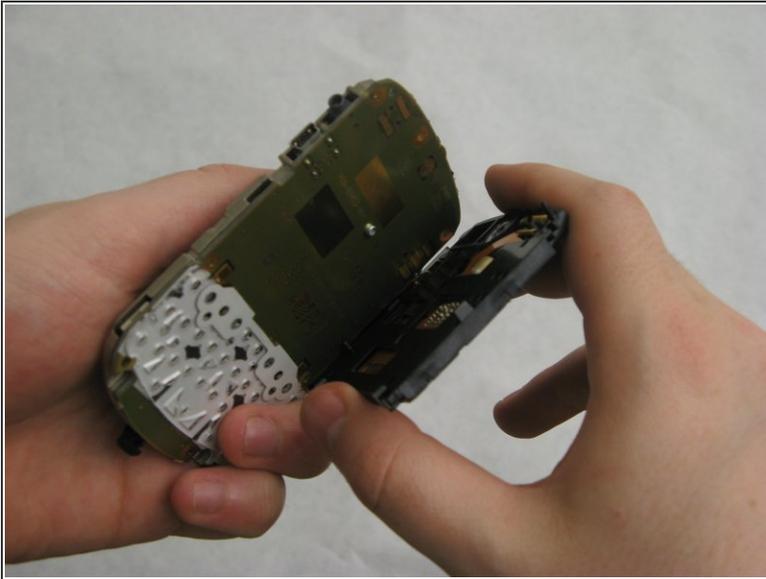

- Pull the LCD screen off of the board.

To reassemble your device, follow these instructions in reverse order.