



HTC EVO 4G Stand Replacement

How to replace the stand.

Written By: Sage Jurado






TOOLS:

- [T5 Torx Screwdriver](#) (1)
 - [T4 Torx Screwdriver](#) (1)
-

Step 1 — Battery

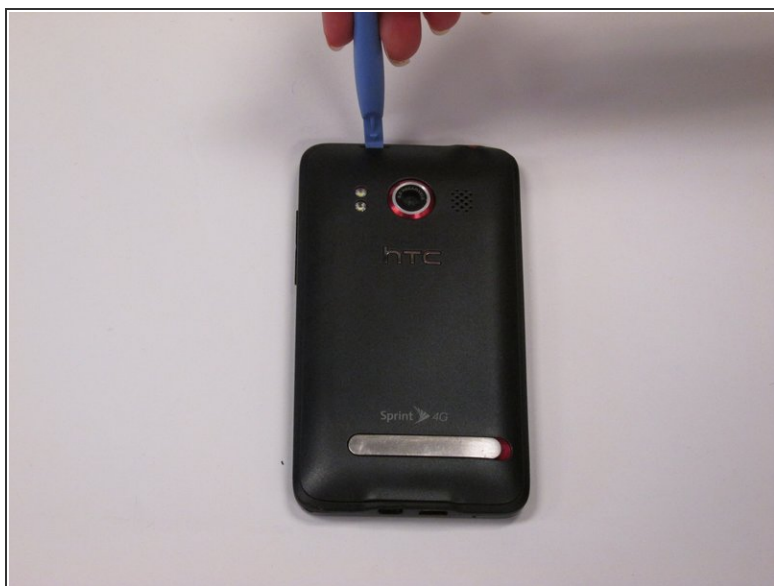

- Remove the back case of the phone with a plastic opening tool by placing the tool in the tab on the back of the phone.

Step 2



- Remove the battery from the phone by carefully lifting it out with your fingers.

Step 3



- Set the battery aside for disposal. You are now ready to insert a new battery.

Step 4 — Stand




- you should remove the six T5 screws holding the Inner frame in place. Be careful not to loose the screws

Step 5




- Using the plastic opening tools again, gently pry the inner frame apart from the rest of the phone
- Remove the inner frame from the rest of the phone by lifting it off

Step 6

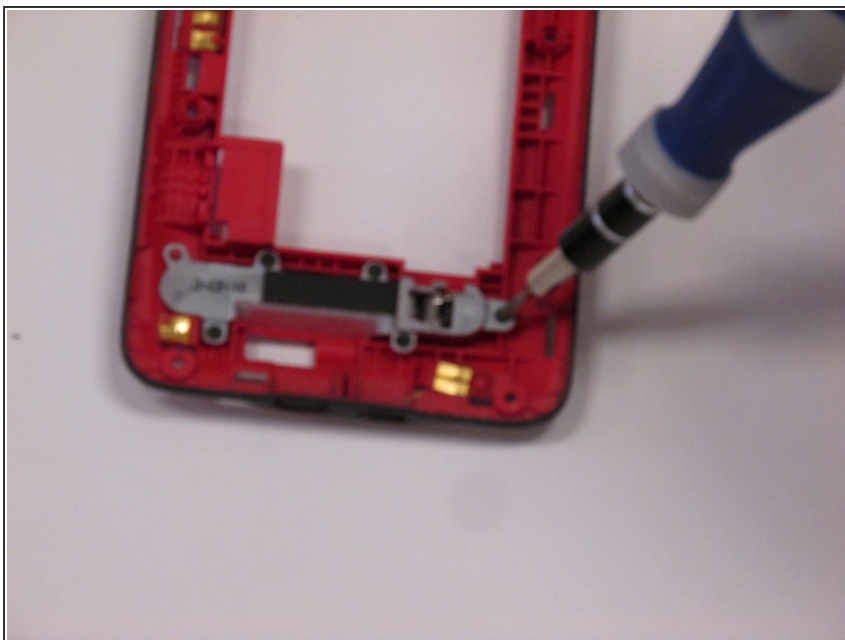

- Remove the five screws that are holding the stand in place.

Step 7

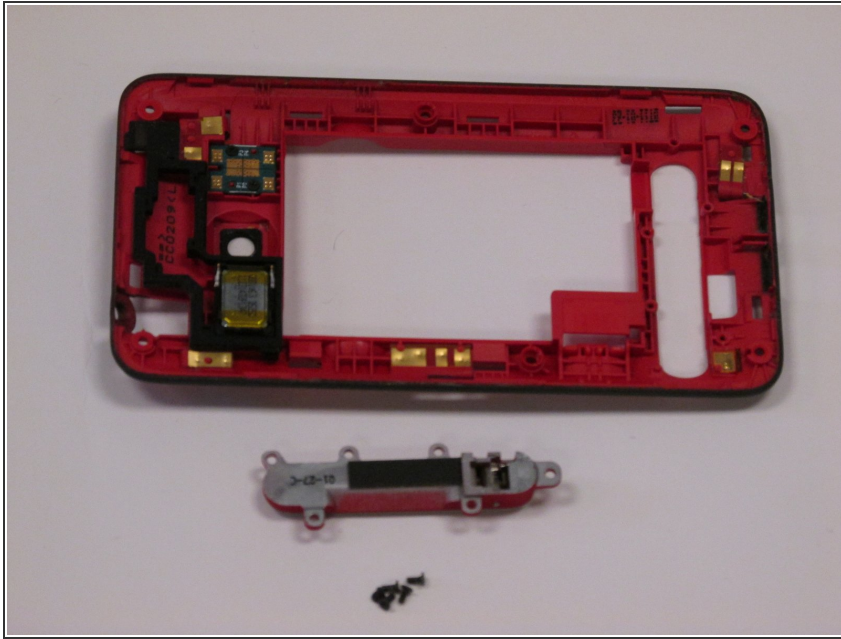

- Remove the stand from the frame by lifting it out. Clear any debris causing it to be jammed, or replace with new stand.

To reassemble your device, follow these instructions in reverse order.