



# Disassembling Cambridge Audio A3i Case

Written By: Colby



---

## INTRODUCTION

This guide describes the steps to opening the case.

---

### TOOLS:

- [8" Needle Nose Plier](#) (1)
  - [Phillips #2 Screwdriver](#) (1)
-

## Step 1 — Case




- Remove 2 screws from each side of the amplifier.

## Step 2



- Remove 2 screws on rear of device. Slide top cover up and back from main case.

## Step 3

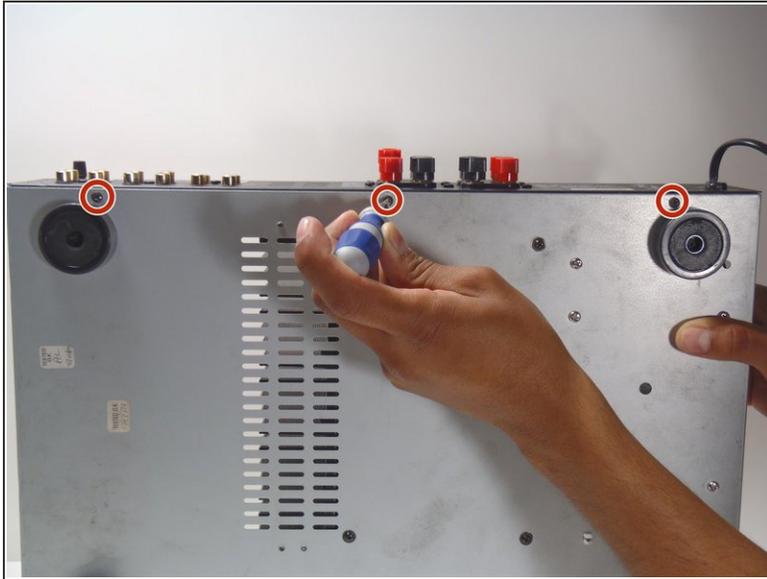

- Remove 3 screws on bottom of case.
- Remove 13 screws on rear panel.
- ⓘ Do not move the rear panel too far, as the power cord is still connected.

## Step 4



- Using a pair of pliers, squeeze the retainer for the power cord as shown and pull it toward the external side the panel.
- It may require some wiggling, but it should slip out of the hole and then off of the cord.

To reassemble your device, follow these instructions in reverse order.