



Disassembling Qualcomm QCP-2760 Rear Backing

This will guide user in the removal of the phone backing cover.

Written By: Xavier



INTRODUCTION

Must remove battery first. Prerequisite to removal of antenna, motherboard and screen.



TOOLS:


- [T6 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery



- Unscrew the back battery plate from the phone using a T6 Torx screwdriver.
- ⓘ The screw does not need to be removed completely, the back battery plate will unhinge from the phone.

Step 2 — Rear Backing

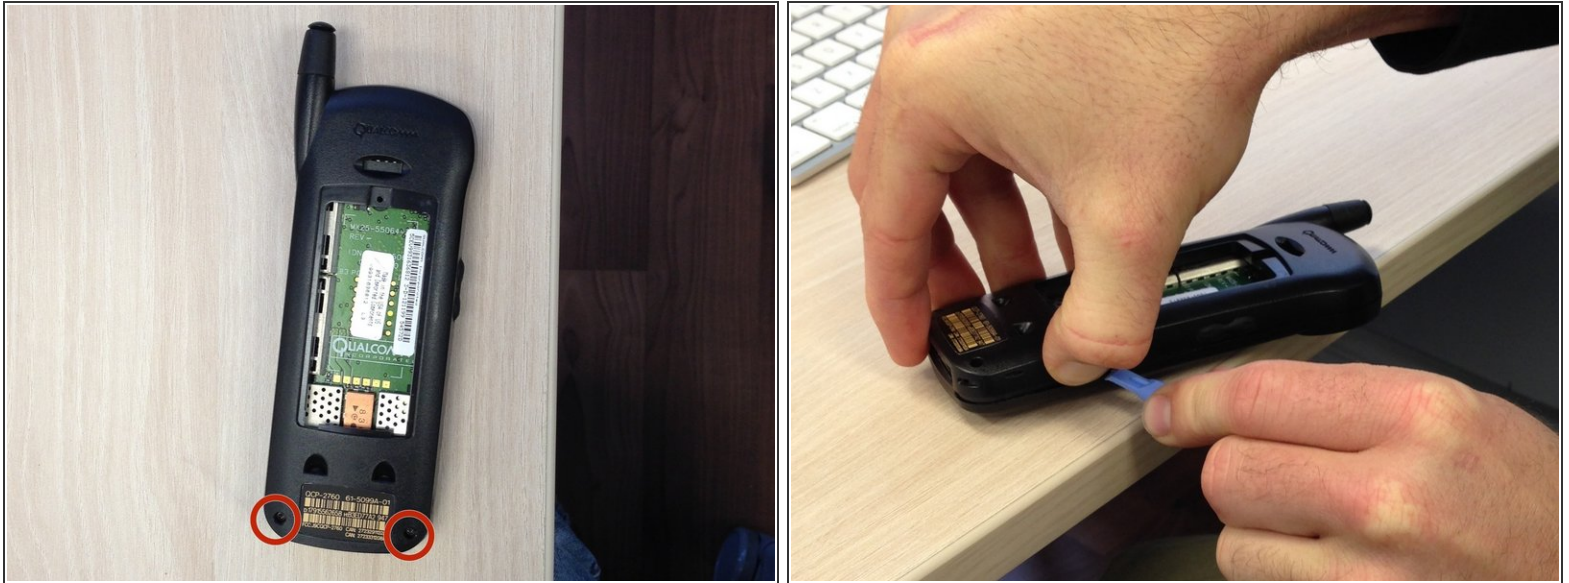

- Using the T6 Torx screwdriver, remove the two screws located at the bottom of the back of the phone.
- Find the seam between the front and back of the phone
- Pry the seam open using a plastic opening tool, or your fingers.
- ⓘ Some force is required

To reassemble your device, follow these instructions in reverse order.