




# Google Cr-48 Chromebook Bottom Casing Replacement

Before starting, please: (1) make sure nothing...

Written By: Robert McLaughlin

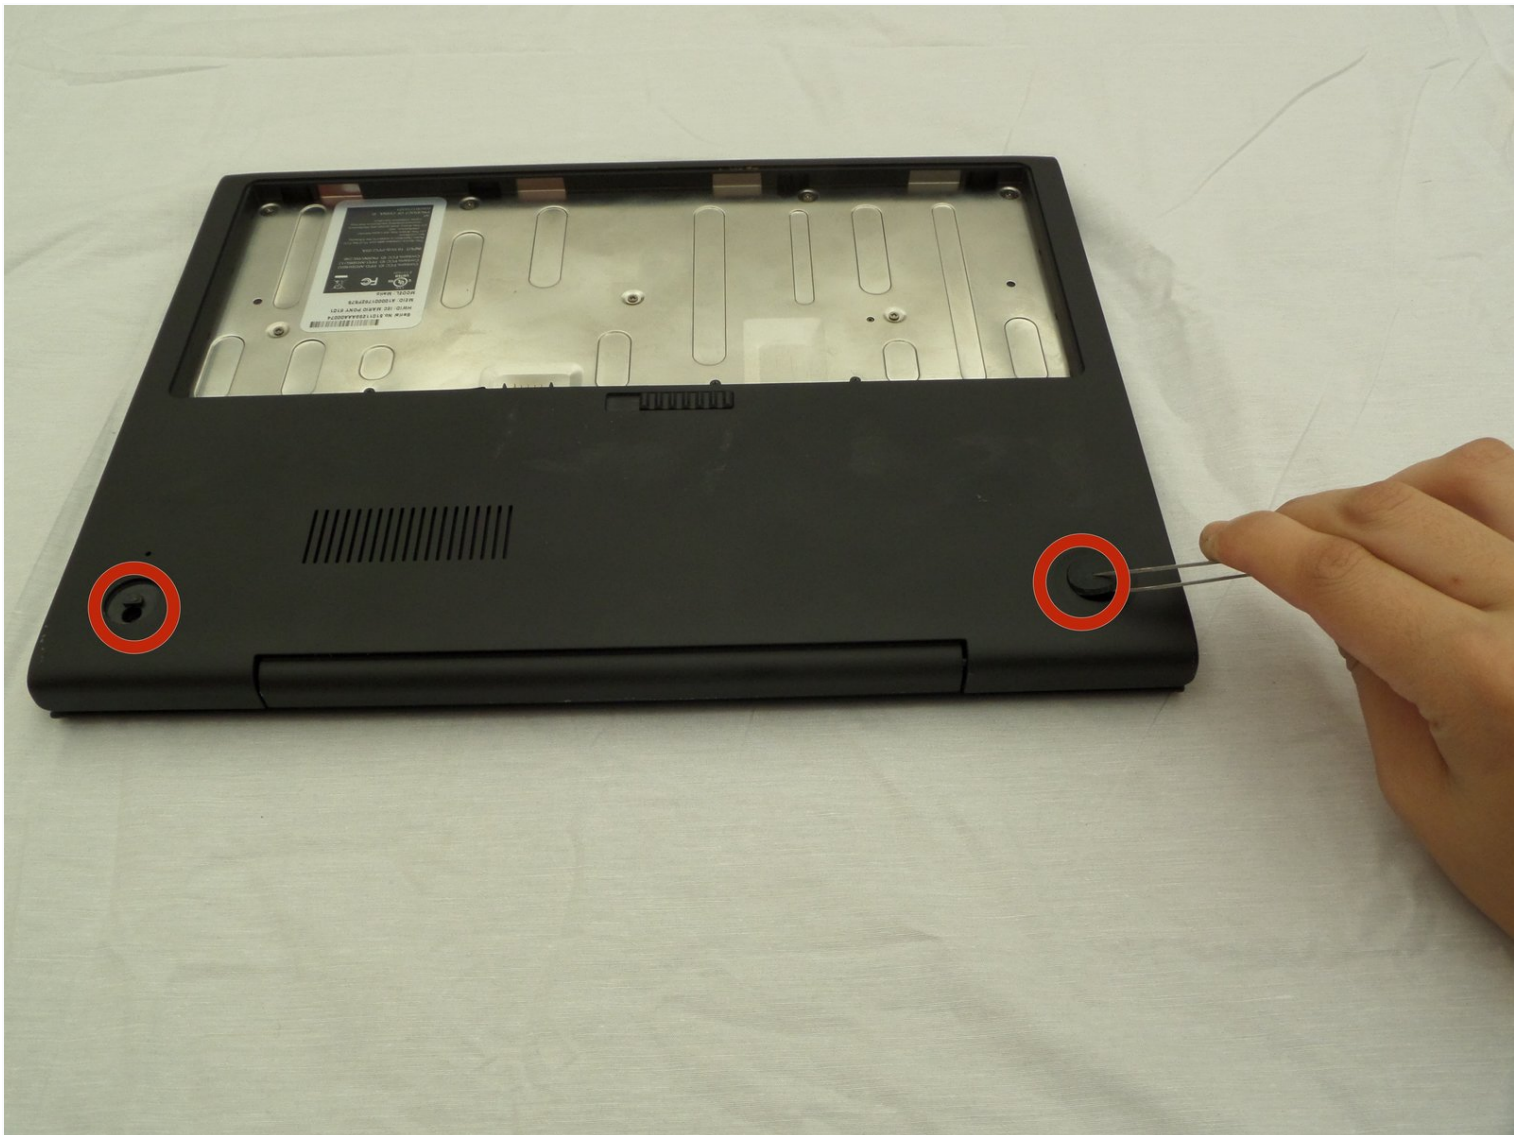

# INTRODUCTION

Before starting, please:

- make sure nothing is attached (such as AC adapter, USB, VGA, audio jack).
- remove any inserted SD card.




## PARTS:

Phillips #00 Screwdriver (1)

Tweezers (1)


---

### Step 1 — Battery

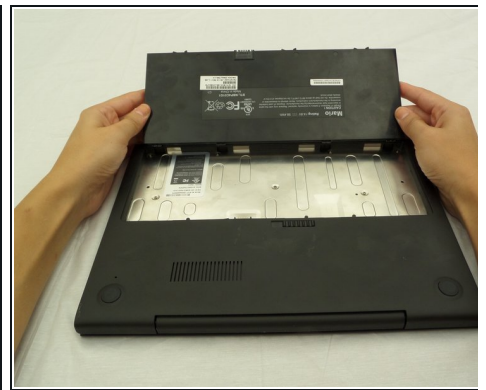


- Slide the switch on the bottom of the laptop until the battery pops out.
- Once the battery pops out, you can remove it.

## Step 2 — Remove Rear Rubber Feet

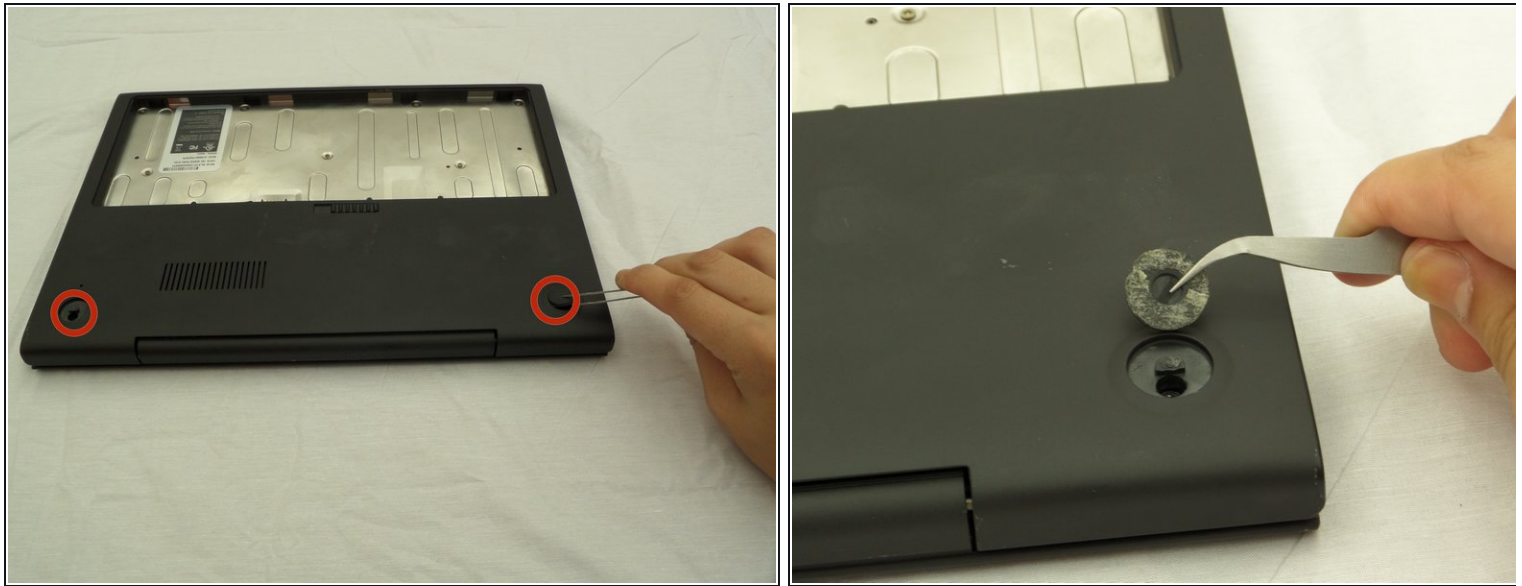



- Using a pair of tweezers, remove the two rear rubber feet to expose two hidden screws.

## Step 3 — Remove Screws

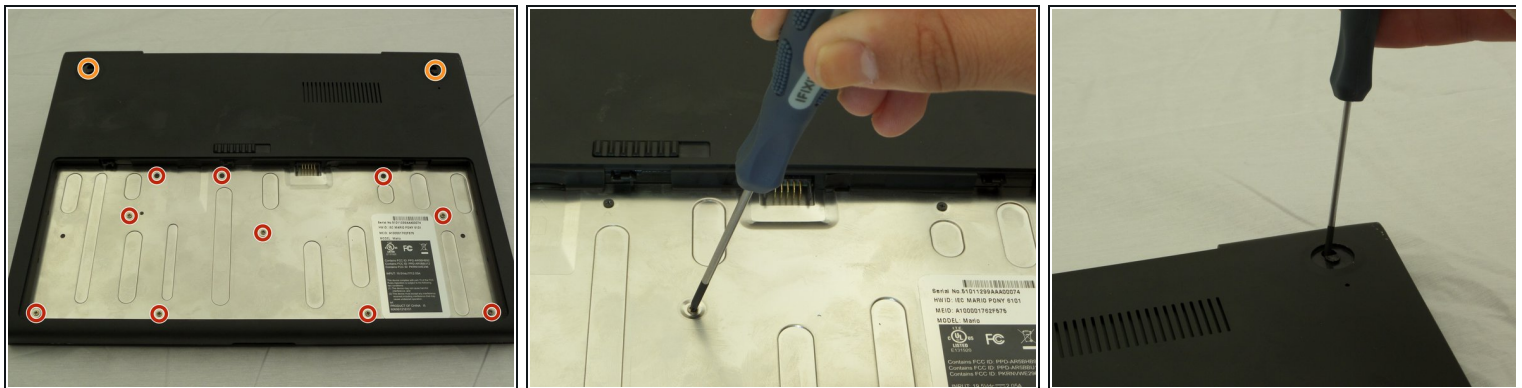

- Remove ten 3 mm screws in the battery compartment using a Phillips #00 screwdriver.
- Remove two 4.5 mm screws under the rubber feet using a Phillips #00 screwdriver.

## Step 4

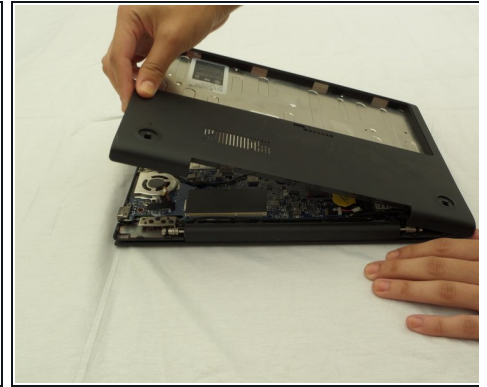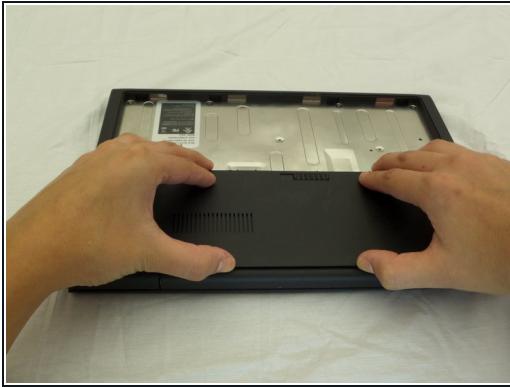

- Starting where the body of the laptop and the laptop screen meet, pry apart the lower case from the rest of the laptop.
- ⓘ The case is easier to remove when separating in a clockwise motion, as seen in the pictures.

To reassemble your device, follow these instructions in reverse order.