




LG G Watch Wristband Replacement

This guide shows how to remove an old wristband and install a new one.

Written By: Deja Miller

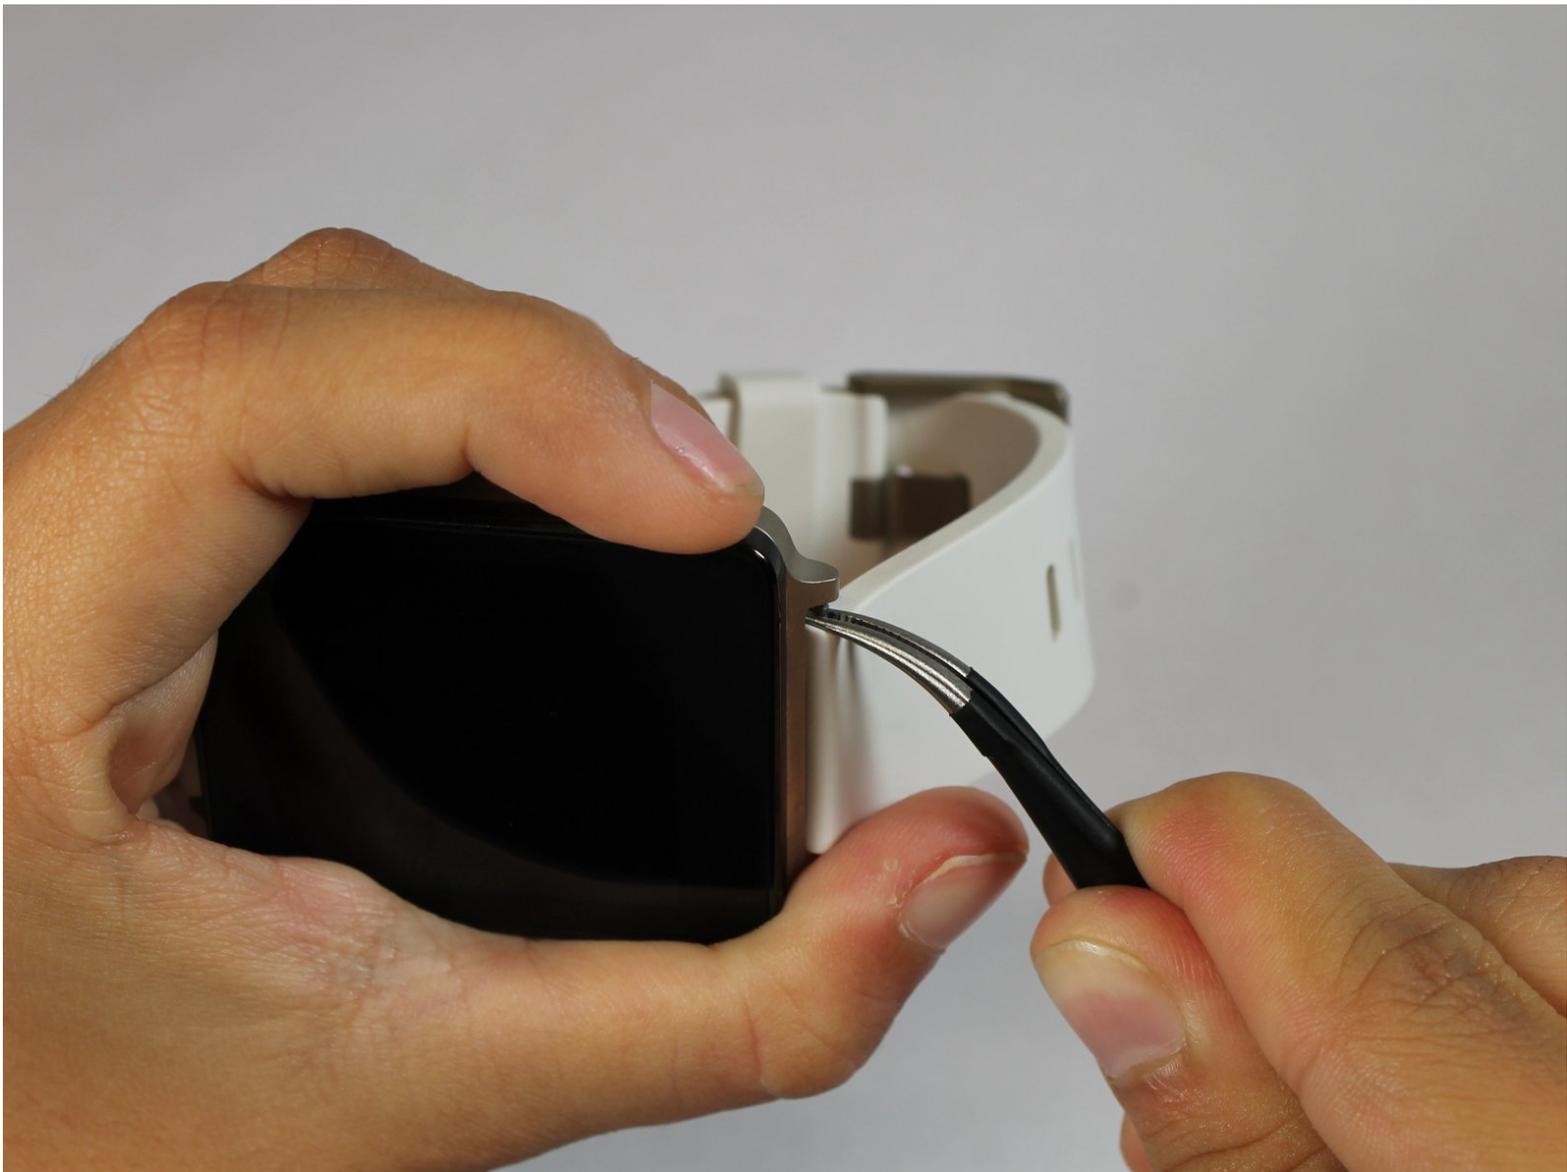

INTRODUCTION

If the buckle or part of the wristband is damaged, it is a good idea to replace the bands on both sides so that they match.

TOOLS:



- [Tweezers](#) (1)
-

Step 1 — Wristband



- ⓘ Spring bars attach the two halves of the wristband to the watch body. The spring bar has a shoulder on either end.
- ⓘ Be prepared to apply some pressure with your fingers to perform the following action.
 - First, slide the wristband down on the spring bar to expose the shoulder of the spring bar.
 - Grasp the exposed shoulder with the tweezers to perform the next step.

Step 2

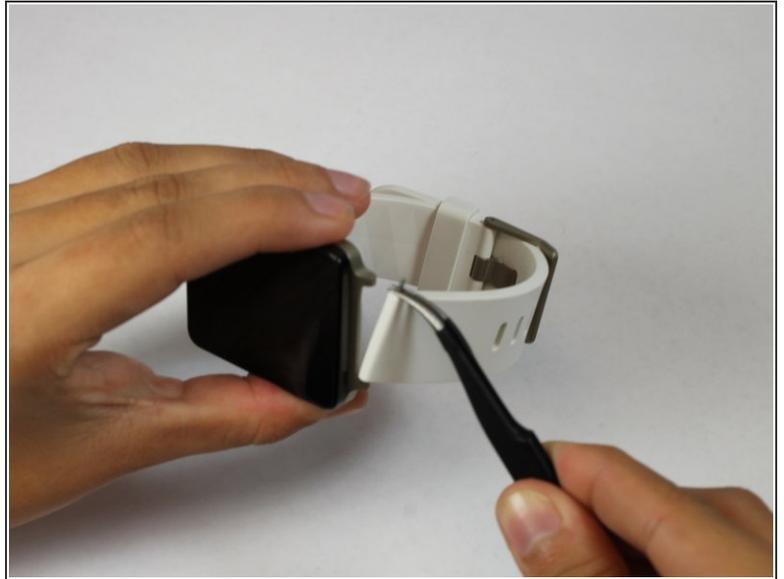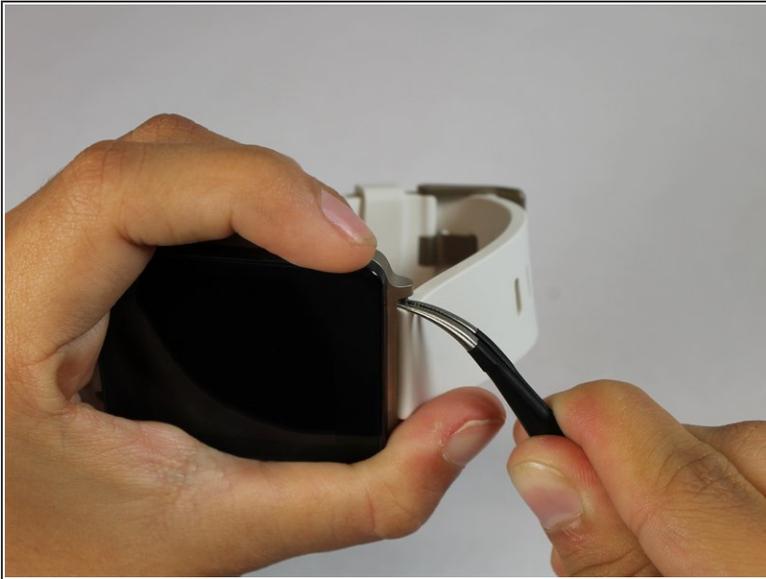

-  This is a challenging step. Do it carefully to prevent the spring bar from flying out of the wristband.
- Use the tweezers to depress the spring bar so that it collapses by a few millimeters and pops out of the hole that was holding it in place.
 - Now carefully pull the other end of the spring bar to detach the wristband from the watch face.
-  Repeat steps 1 and 2 for the other wristband.

To reassemble your device, follow these instructions in reverse order.