




# Motorola RAZR Maxx HD Screen Replacement

## Prerequisite

This is a prerequisite only guide.

Written By: Enrique

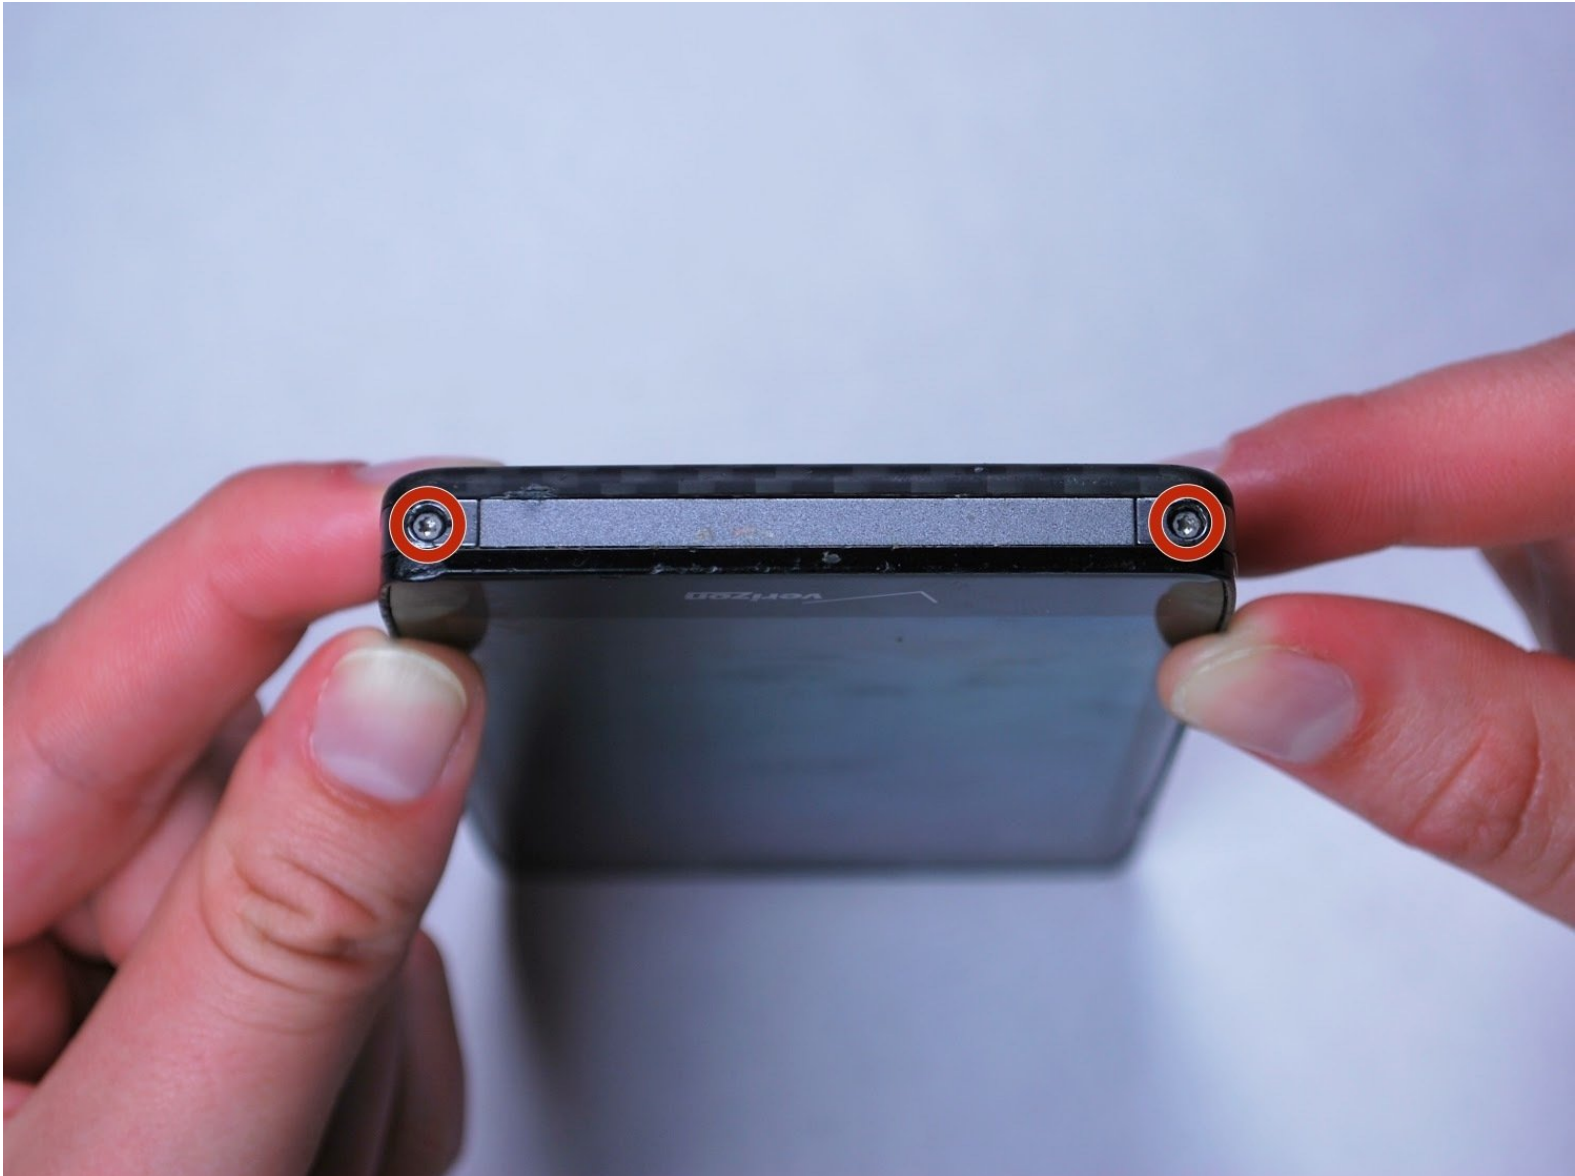



## TOOLS:

- [T5 Torx Screwdriver](#) (1)
  - [Spudger](#) (1)
  - [Paper Clip](#) (1)
-

## Step 1 — Screen Removal




- Use the Torx T5 Screwdriver to remove two 5.0 mm screws at the bottom of the phone.

## Step 2




- To remove the SIM card, use an unfolded paperclip to press down on the metal plate on the left side of the phone until it pops up.

### Step 3

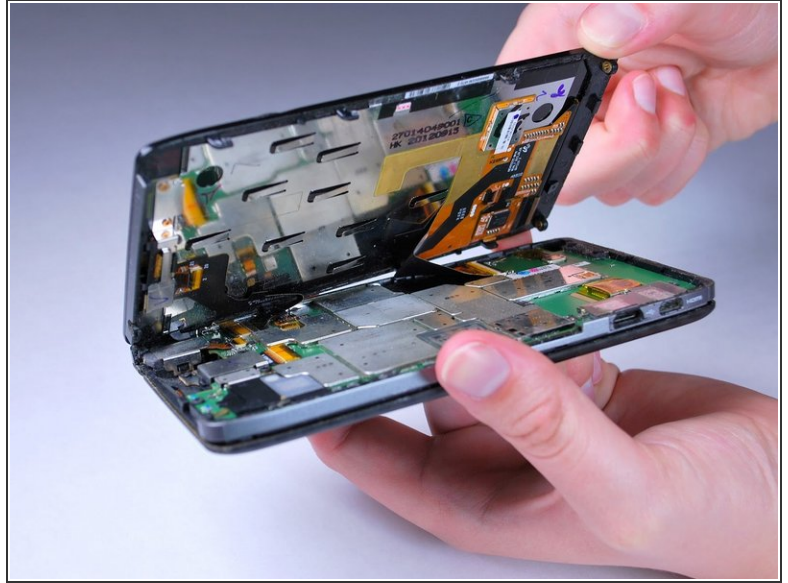


- Gently push the screen toward the top edge of the phone and tilt the screen to reveal the black flex cables.

 Do NOT remove the screen all the way or the flex cables will be damaged.



## Step 4

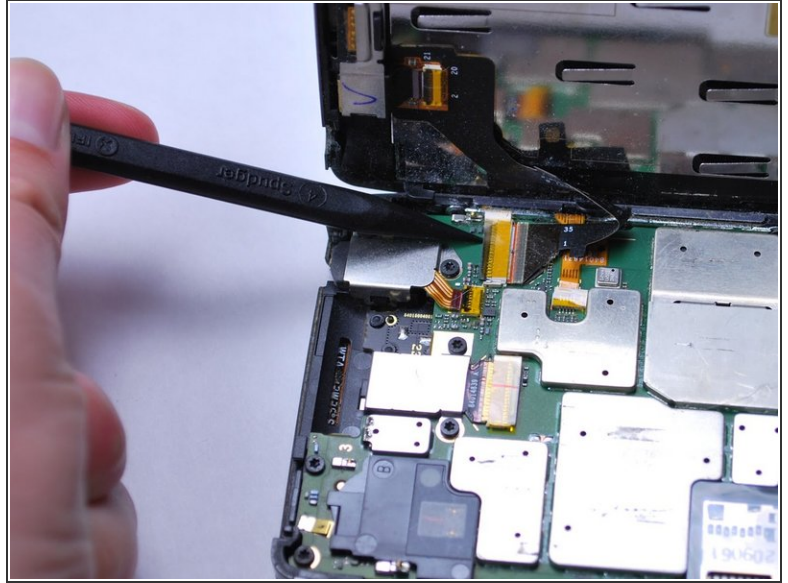

- Release the two black ribbon flex cables by gently pulling up on the connection using the spudger. Then lift the screen to remove.
  - ⚠ Make sure to remove the flex cables before completely removing the screen.
- ⓘ When reassembling, align the white bands on the edge of the screen so that a connection is made.

To reassemble your device, follow these instructions in reverse order.