




Nokia 6310i Back Cover Replacement

Opening the phone casing.

Written By: Mustafa

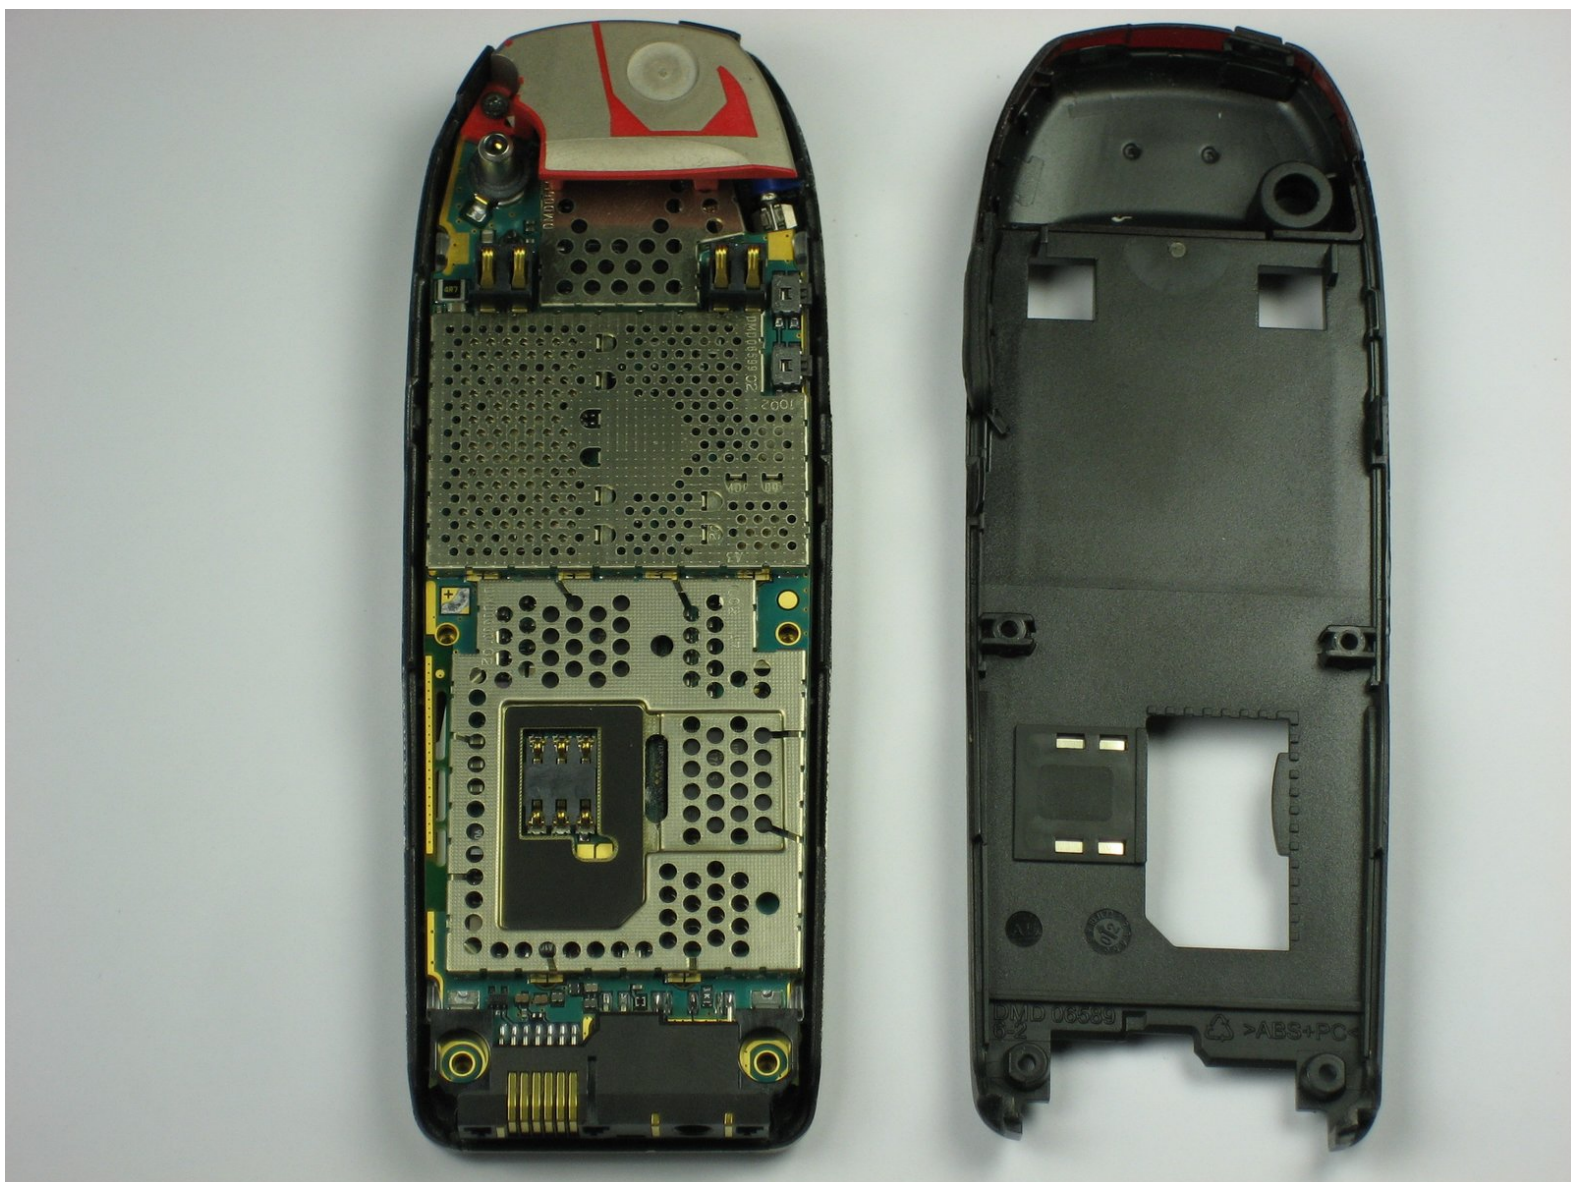



TOOLS:

- [iFixit Opening Tools](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Battery



- Press and hold the battery release button and slide the battery away from the Nokia logo

Step 2 — SIM card



- Slide the SIM card lock away from the SIM card.



 The SIM card pops out. Remove the SIM card.

Step 3 — Back Cover





- Unscrew and remove the four T6 Torx screws.

Step 4

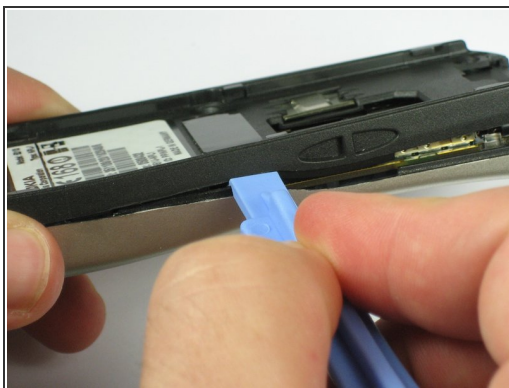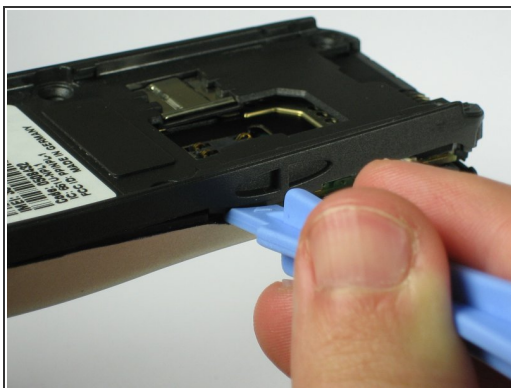

- Insert a plastic opening tool between the faceplate and the black backplate. Gently pry them apart, working from the lower end to the upper side of the phone.

Step 5

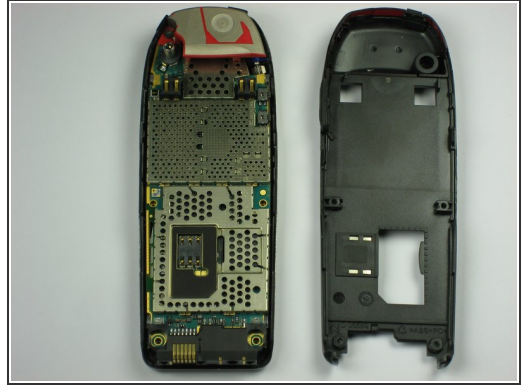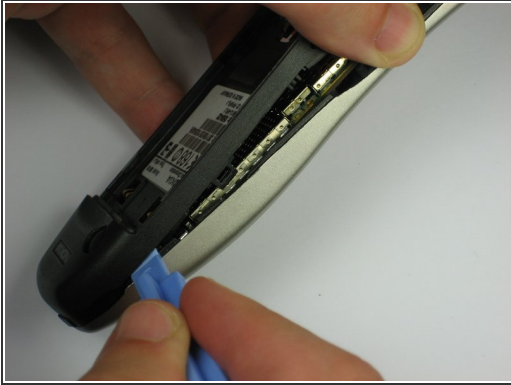

- Use the plastic opening tool to separate the top part of the backplate.

 The plastic clips at the top require slightly more force to separate.

To reassemble your device, follow these instructions in reverse order.