



LexiBook Tablet One Speaker Replacement

Remove and replace the speaker in order to restore the sound to your Tablet One.

Written By: Jordan



INTRODUCTION

This guide will show you how to replace your speaker which will require a plastic spudger and soldering iron.

TOOLS:


- [Soldering Workstation](#) (1)
 - [Spudger](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Speaker




- Insert the blue plastic opening tool where the case has a seam. Move side to side until you hear a clip pop. Move around the edge of the case until all clips are separated. The clips are 1.5 in. apart within the case.

Step 2

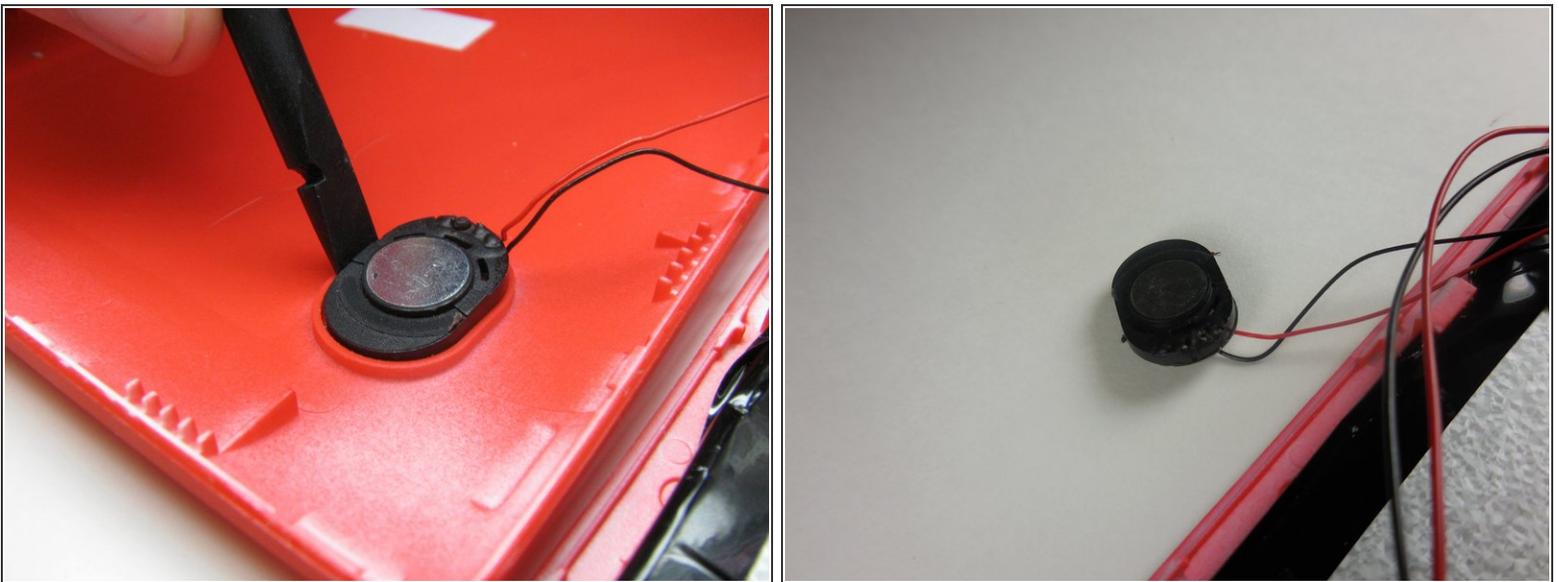

- After successfully separating the casing insert a plastic spudger between the case and the speaker. Carefully pry the speaker out. Once the speaker is removed set the back casing aside.

Step 3

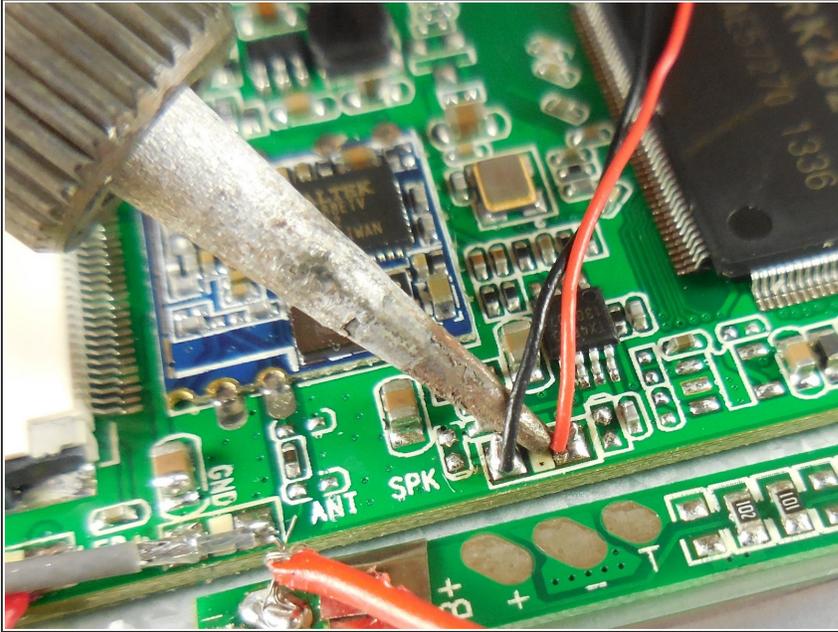

- Using a soldering gun, apply heat where the speaker wires meet the motherboard. Heat the solder around both the black and red wires until they easily slide away.

⚠ Be careful not to heat the motherboard too long so to avoid damaging other components. Also, care to avoid liquefying the solder on any near by components.

ⓘ [How to Solder](#) is iFixIt's official guide to use a soldering gun.

To reassemble your device, follow these instructions in reverse order.