




# Samsung Gusto 2 Camera Replacement

Written By: Marc Carreira

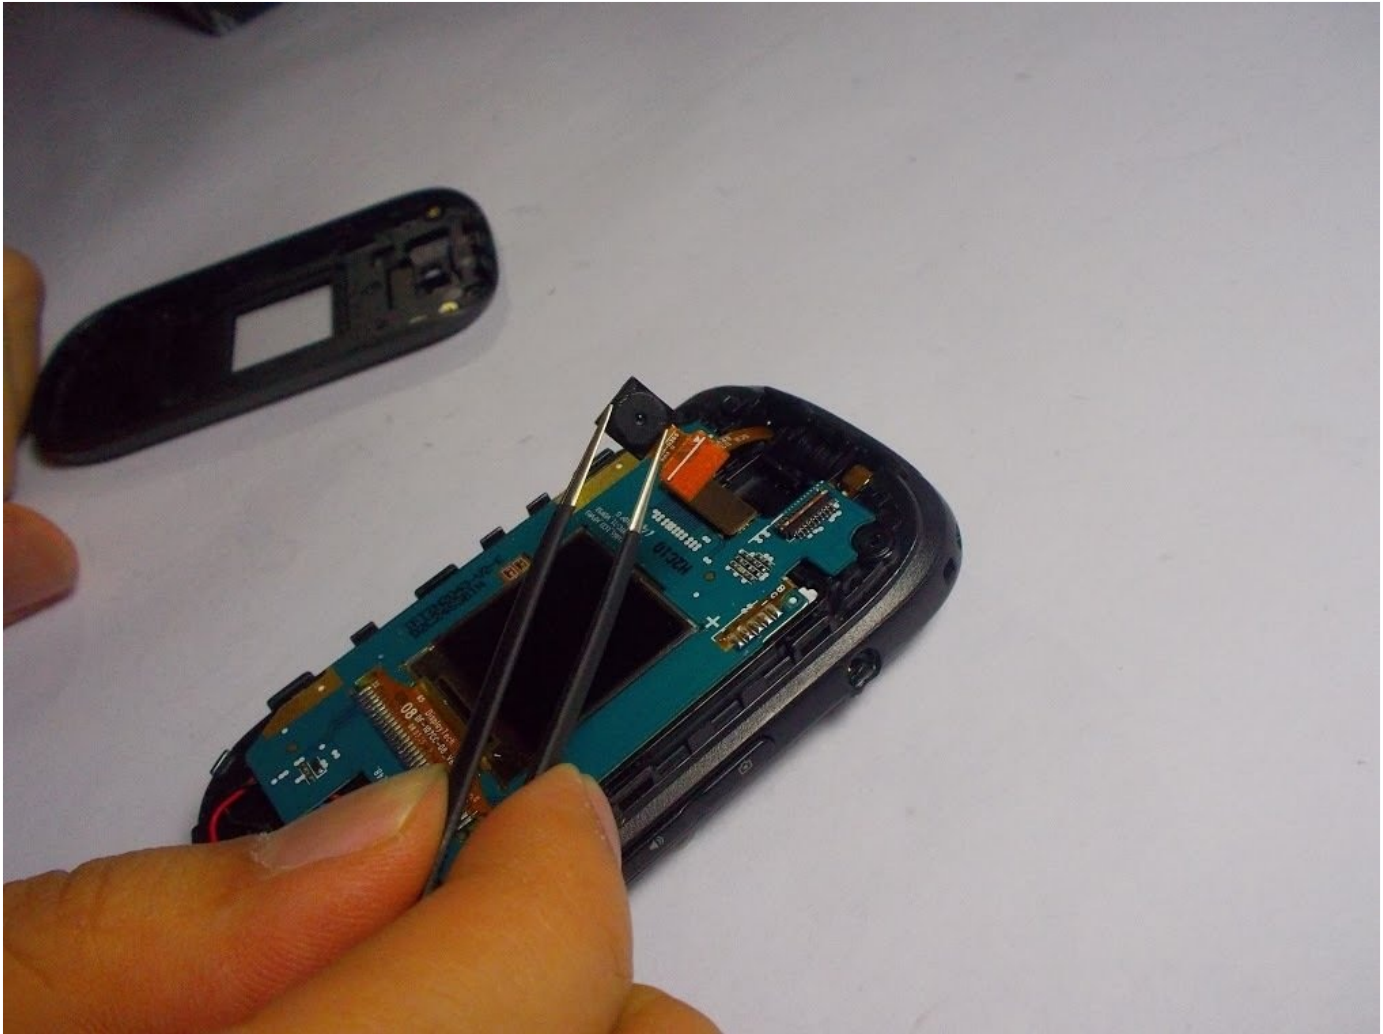

## TOOLS:

Phillips #0 Screwdriver (1)

Spudger (1)

Tweezers (1)

### Step 1 — Camera




- Flip open the phone and place it flat as shown.

### Step 2




- Remove the two screws near the front screen.

### Step 3

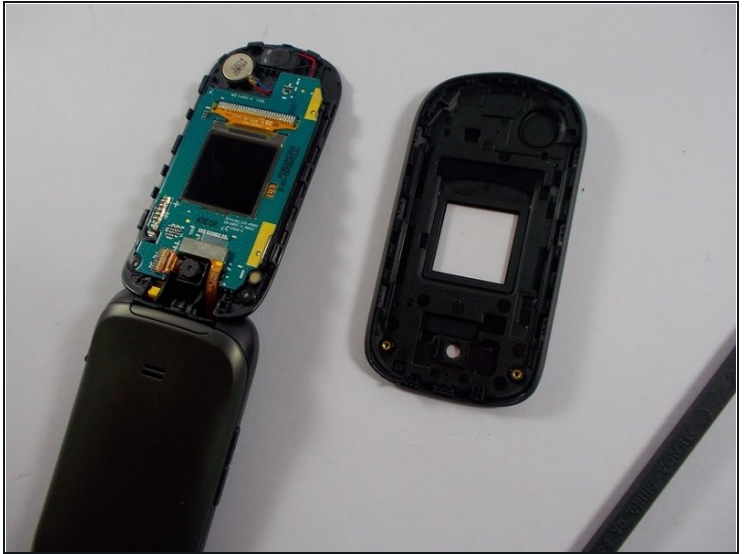


- Use a spudger to remove the front cover of the phone.
- Insert the spudger as shown and move slowly around the length of the edge to remove the cover.
- Then, close the phone so that the front is showing.

### Step 4

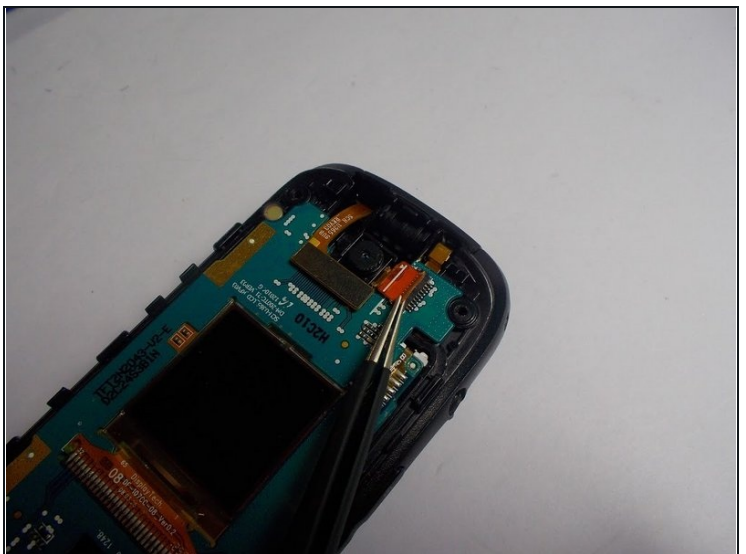

- Look at the first image to identify the location of the camera.
- Use [tweezers](#) to remove the orange flap keeping the camera in place.

## Step 5

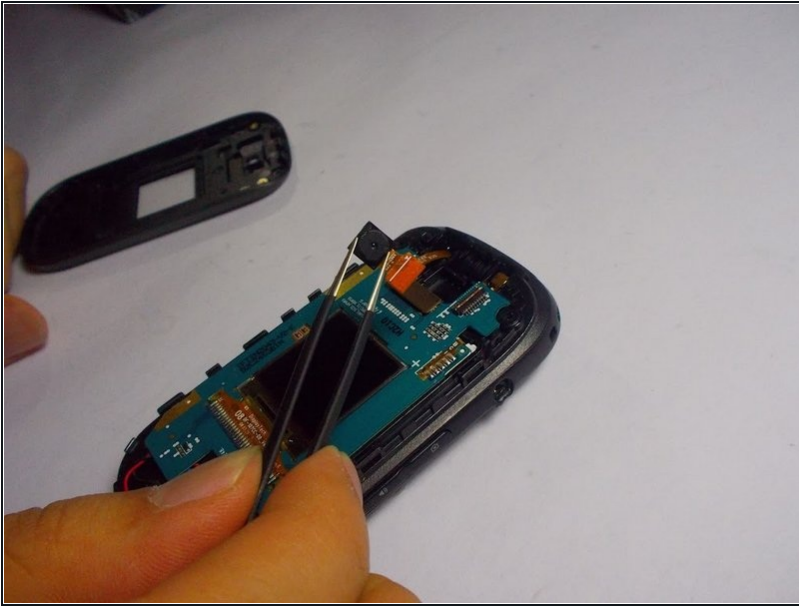

- Use tweezers to gently remove the camera.

---

To reassemble your device, follow these instructions in reverse order.