




# Tengda S5 Plus Rear Camera Replacement

This guide will show you how to replace the rear camera on the Tengda S5+.

Written By: Jholmesford

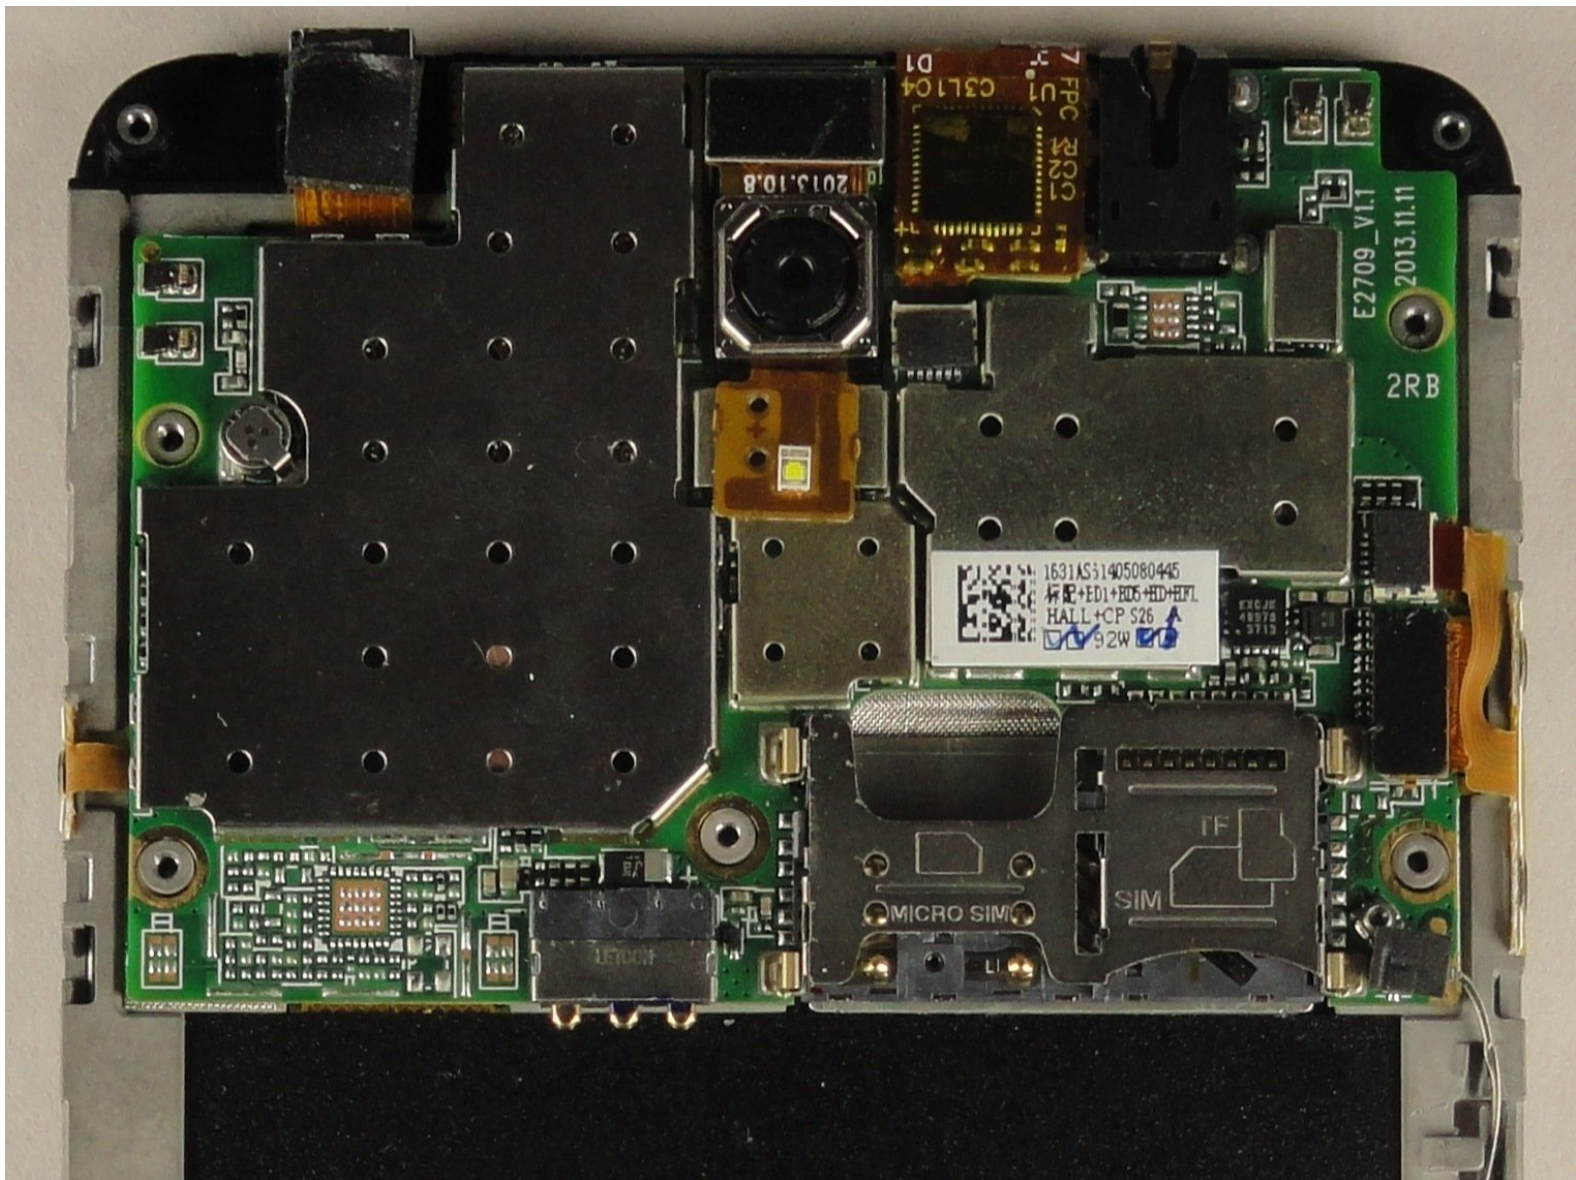

# INTRODUCTION

Use this guide in order to replace the rear camera on the Tengda S5+.



## TOOLS:


- [iFixit Opening Tools](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
-

## Step 1 — Back Panel



- Place the phone screen-side down.

## Step 2

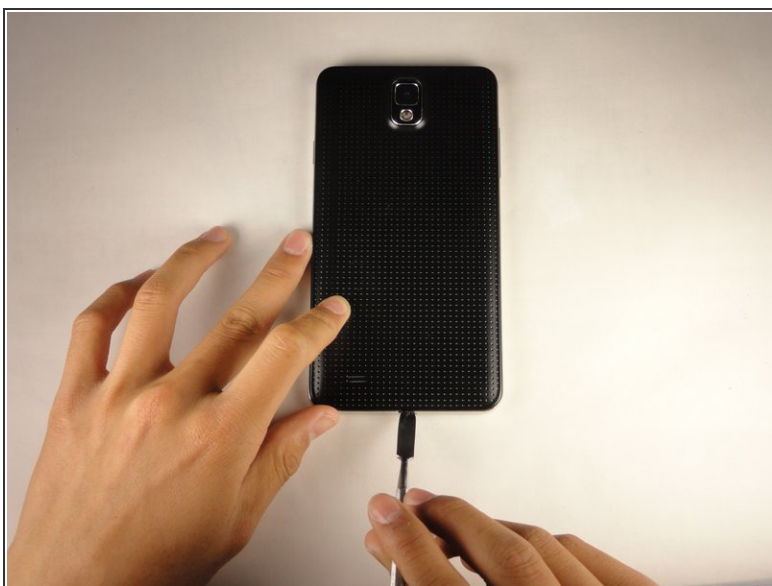

- Using your fingernail or any prying tool (we used the Metal Spudger), begin to pry away the back panel starting at the bottom of the phone.
- Continue to work your way around the phone counterclockwise until you can pull the back cover off.



## Step 3 — Battery




- Remove the battery by placing your thumb in the slot, pushing the battery up and pulling it out.

## Step 4 — Rear Camera




- Unscrew the twelve 3 mm screws from the back panel using a Phillips #00 screwdriver.
- ⓘ Keep these screws in a safe place. They are very small and easy to lose.

## Step 5

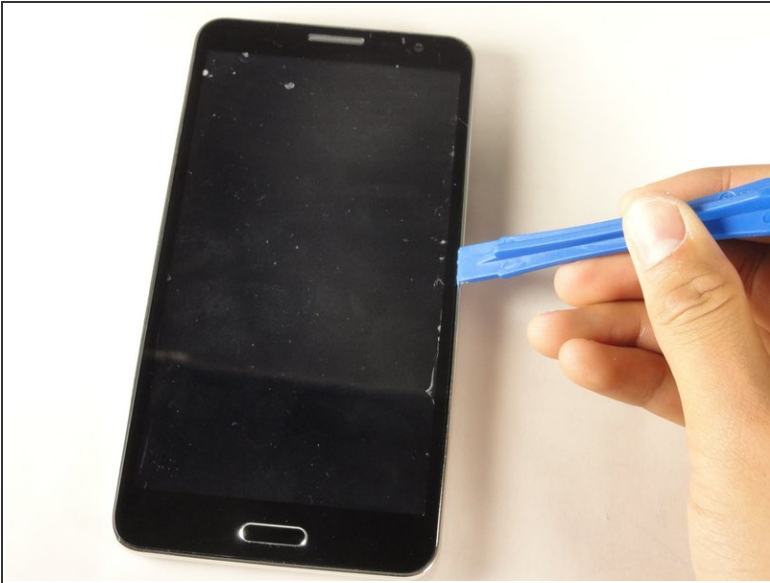

- Using the plastic opening tool, create space between the front screen and the metal casing.
- Once the screen is separated from the back panel, pull the two pieces apart.

## Step 6

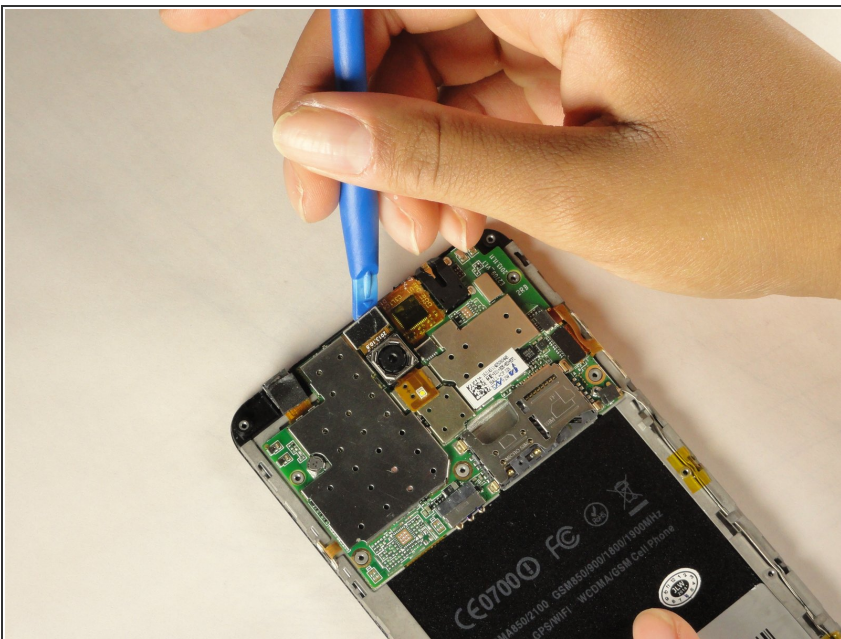

- Place the phone facing screen down.
  - Using the plastic prying tool, gently disconnect the black connector cable.
- i** The connector cable should easy snap out with little force.

## Step 7



- Using the plastic prying tool, pry the camera from the tape holding it in place.

⚠ Be careful not to rip the tape.

To reassemble your device, follow these instructions in reverse order.