



Samsung Eternity Antenna/Speaker Replacement

You will need to find a clean area to work in...

Written By: Matthew Kidd



INTRODUCTION

You will need to find a clean area to work in and have the necessary tools. Follow this guide to gain access to your cellphone's antenna/speaker module.


TOOLS:

Phillips #00 Screwdriver (1)

Spudger (1)

Tweezers (1)

Step 1 — Back Case

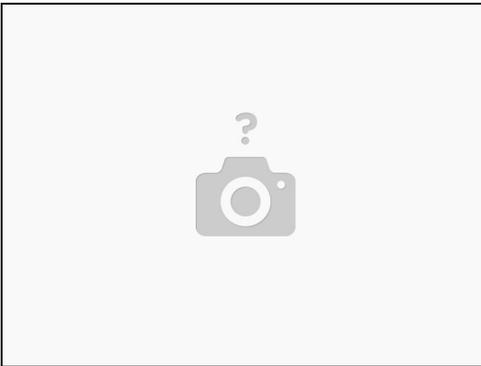


- Remove the back battery cover.

Step 2




- Using the Phillips #00 screwdriver, remove the phone's battery.

Step 3

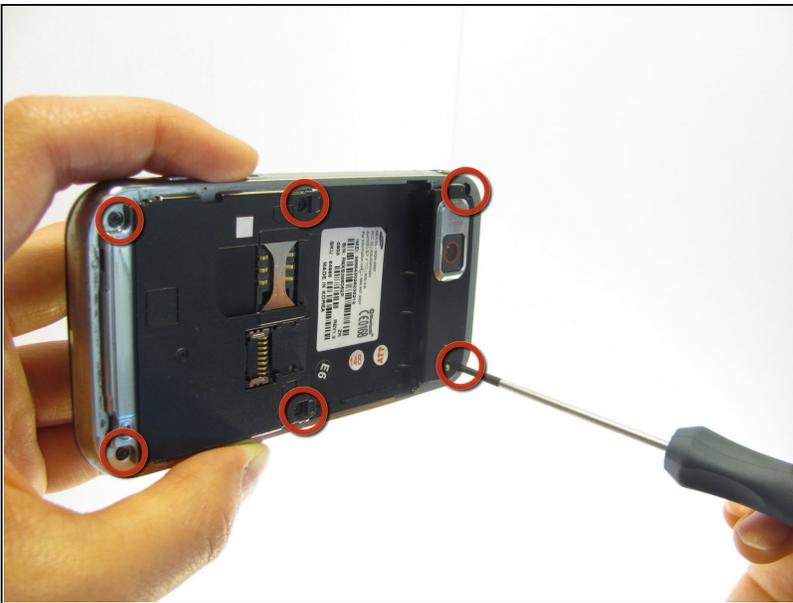


- Remove six (4.28 x 1.25)mm screws using the Phillips #00 screwdriver

Step 4

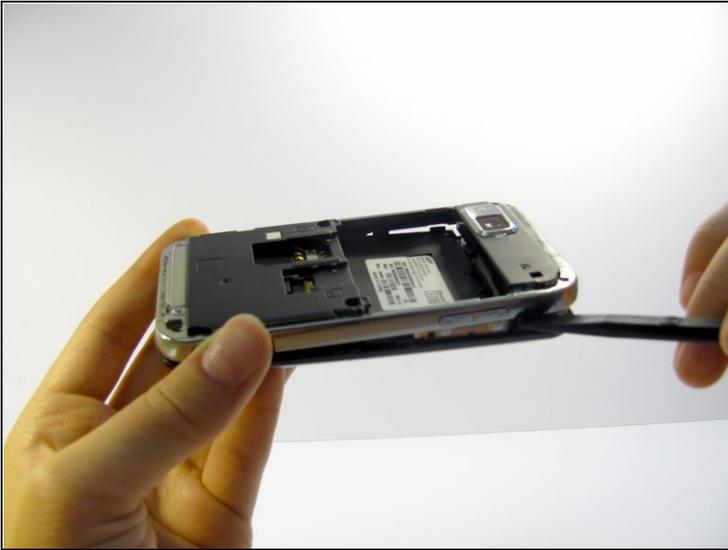


- Continuing to use the Phillips #00 screwdriver, gently pry the silver plastic back plate from the body of the phone.

Step 5 — Antenna/Speaker

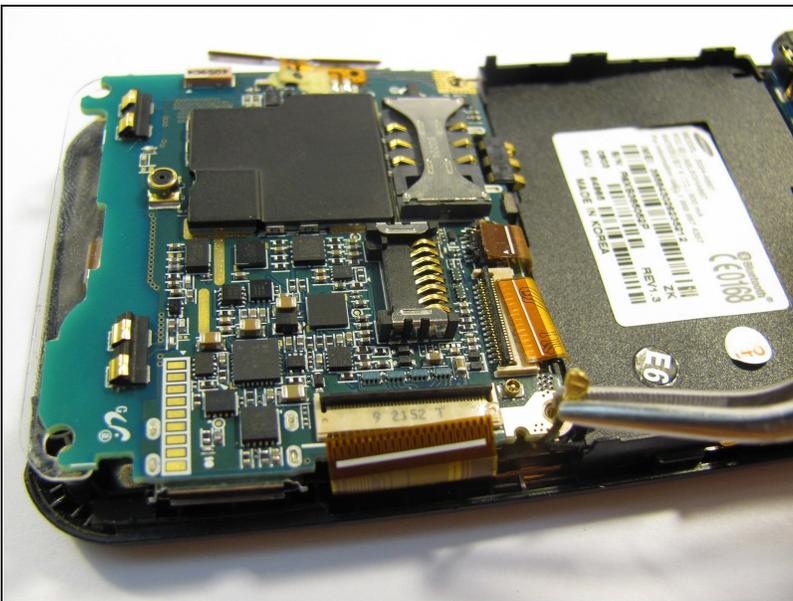


- Pop the antenna plug off of its socket with a pair of metal tweezers.

Step 6

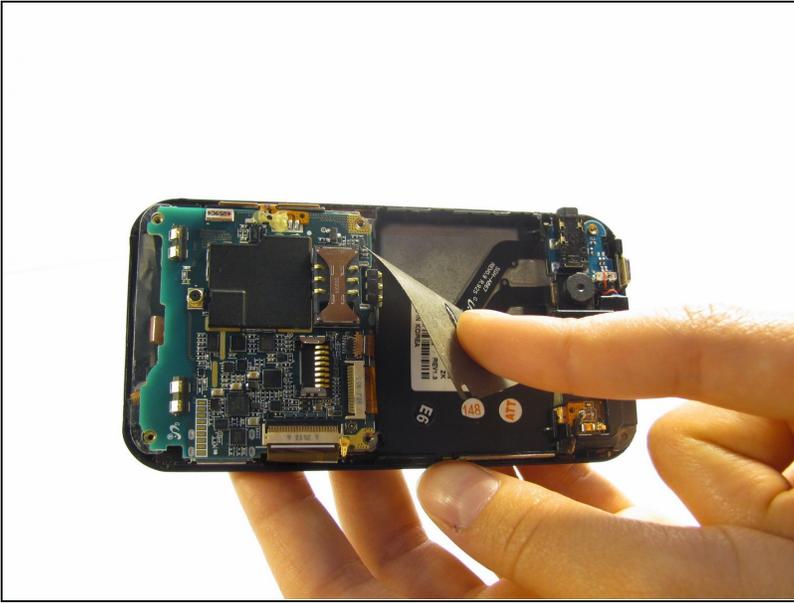


- Peel off the Identification sticker.

Step 7

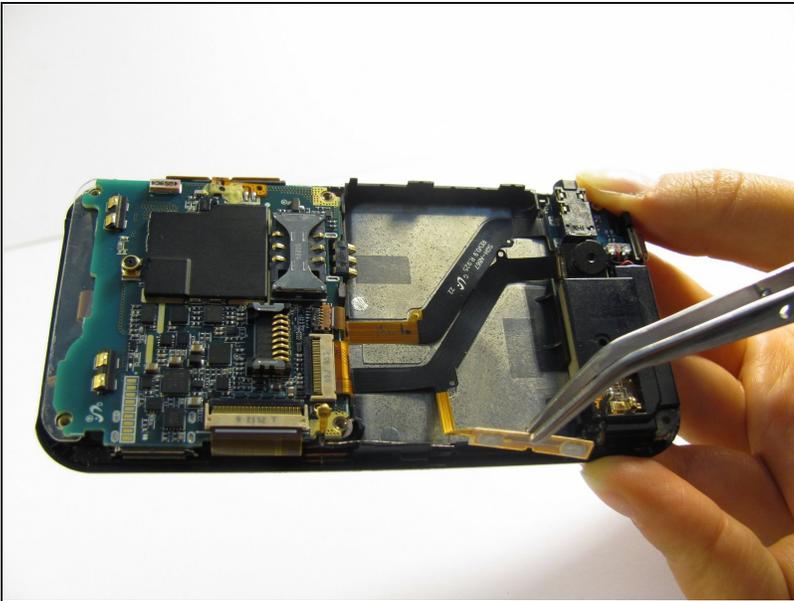


- Peel the button sensor on the side of the motherboard off of the case.

Step 8

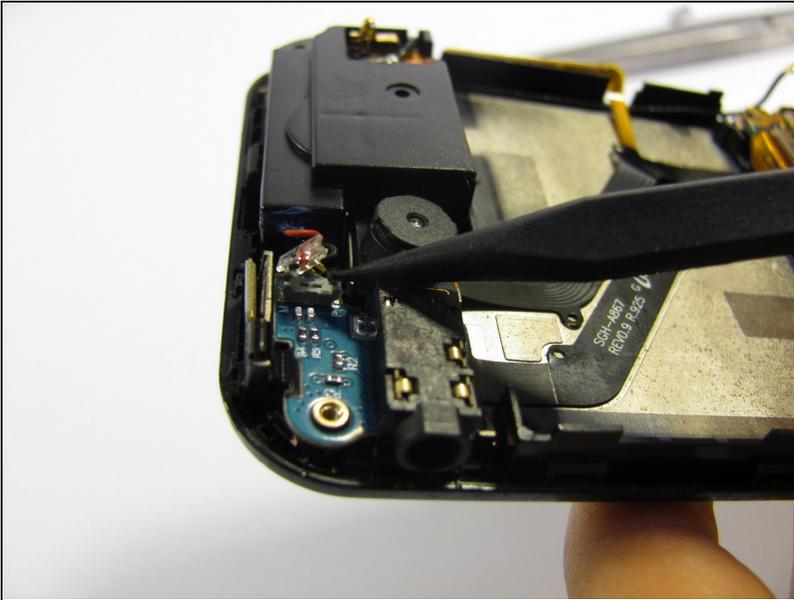

- Pop the speaker plug out of its socket.

Step 9

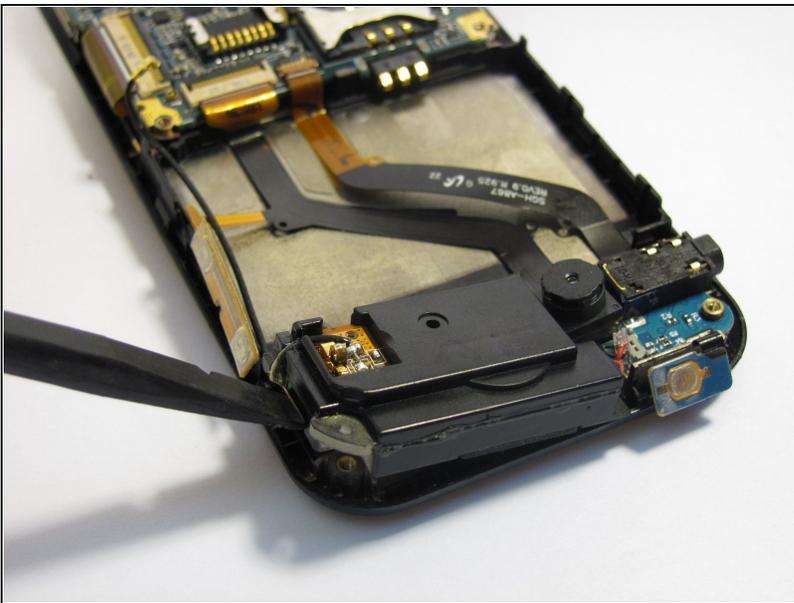

- Pry the antennae/speaker component out of its casing. You need to use a little force to get the piece to pop out.

Step 10



- You will now be able to replace the antenna/speaker module.

To reassemble your device, follow these instructions in reverse order.