



# Sony Ericsson K750i Keypad Replacement

Please note: you must remove the screws from...

Written By: Abby Evers



# INTRODUCTION


Please note: you must remove the screws from the back casing before beginning this guide.



## TOOLS:

- [Phillips #0 Screwdriver](#) (1)
  - [Flathead 3/32" or 2.5 mm Screwdriver](#) (1)
  - [T6 Torx Screwdriver](#) (1)
-

## Step 1 — Back Casing

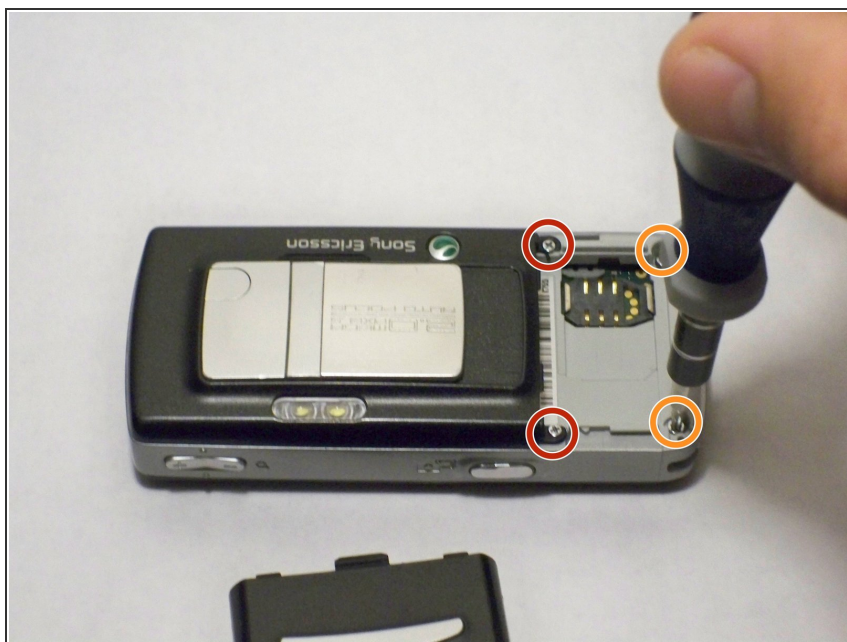

- Remove two Phillips #0 screws from the battery chamber.
- Remove two Torx T6 screws from the battery chamber.


## Step 2



- Gently pry off the back casing.
- ⓘ Work an opening tool around the entire seam before attempting to pull off the casing. This action will reduce the chance of cracking the casing.



### Step 3

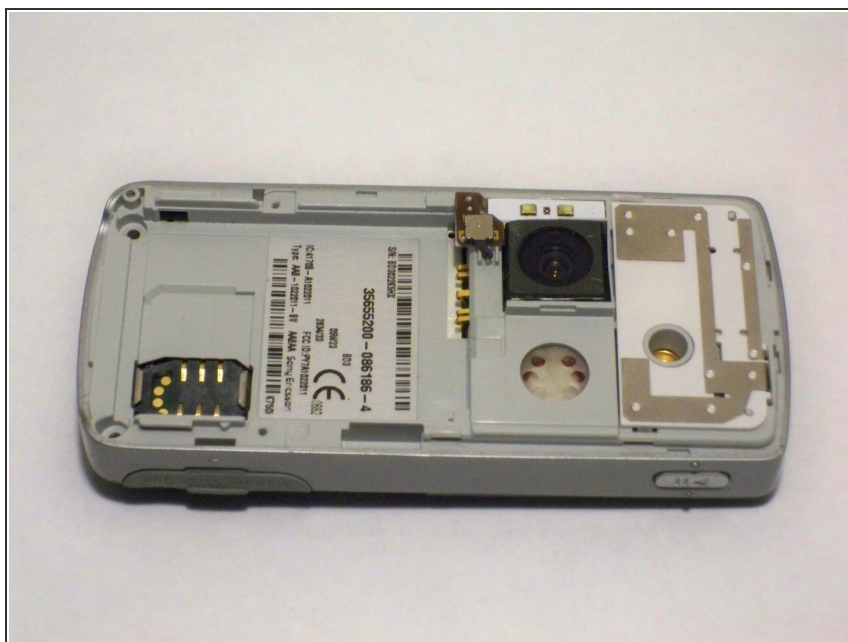

- Remove the casing to expose the camera's components.

### Step 4 — Keypad




- Gently pry open the front casing by working an opening tool along the entire seam.

## Step 5



- Remove the front casing by gently lifting it from the phone.
- ⓘ Be careful not to pull off any other delicate pieces.

## Step 6

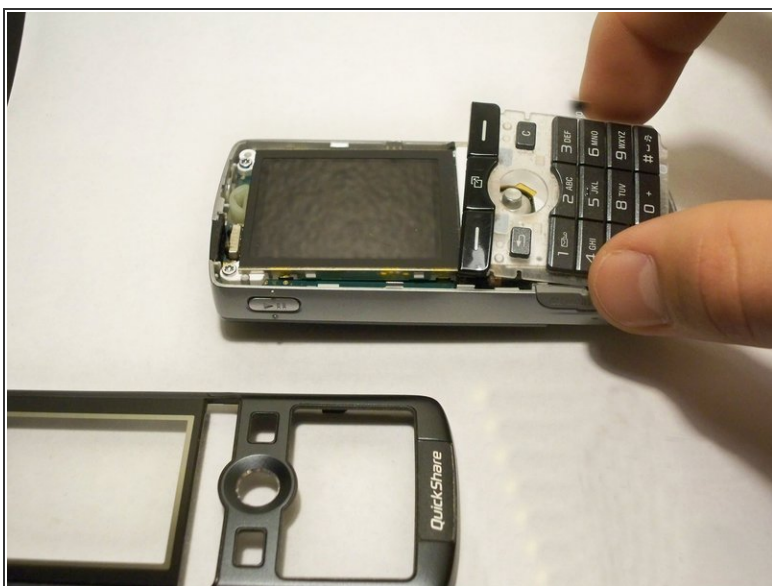

- Remove the keypad.

⚠ The LCD screen is very fragile. Be careful not to catch the keypad on it while removing.

To reassemble your device, follow these instructions in reverse order.