



# Samsung Rant Keypad Replacement

In order to access the keypad, you must first...

Written By: Denise Cooper



# INTRODUCTION

In order to access the keypad, you must first remove the back cover, battery and rear case from the cell phone.

---

## TOOLS:

Anti-Static Project Tray (1)

Phillips #00 Screwdriver (1)

Tweezers (1)

---

## Step 1 — Back Cover



- Turn the phone over in the palm of your hand, with the screen facing down.
- While grasping the bottom part of the phone with one hand, use your thumb to push the release button at the end of the phone.
- This will release the back plate latch; then lift the back plate up and out toward the other end of the phone.
- You should now be able to lift the plate completely off of the phone.

## Step 2 — Battery



- Carefully remove the battery from the phone.

## Step 3 — Rear Case



- Use a Phillips #00 screwdriver to loosen and remove all 3 screws.





## Step 4



- Gently separate the rear case from the front case.

## Step 5 — Keypad

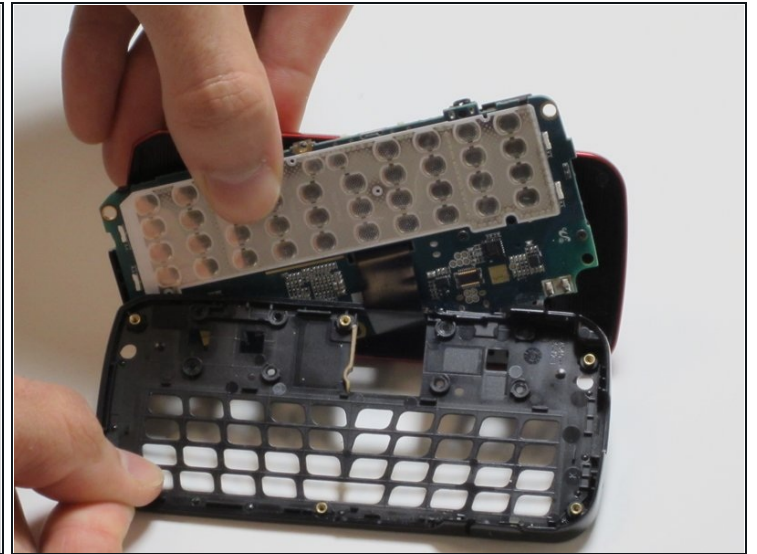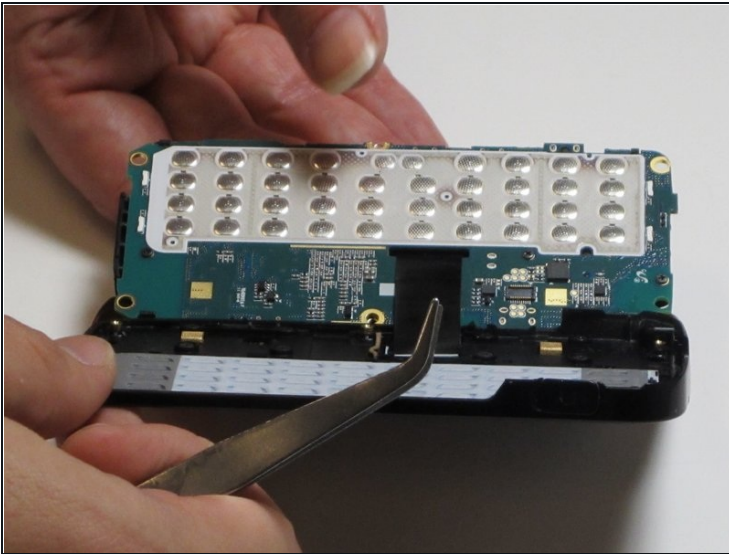

- Using a pair of [tweezers](#), grip the keypad gently.
- Lift the keypad out of the phone and replace it (if necessary).

---

To reassemble your device, follow these instructions in reverse order.