




# LG VX8700 Ear Piece Replacement

Written By: Stanley Thomas




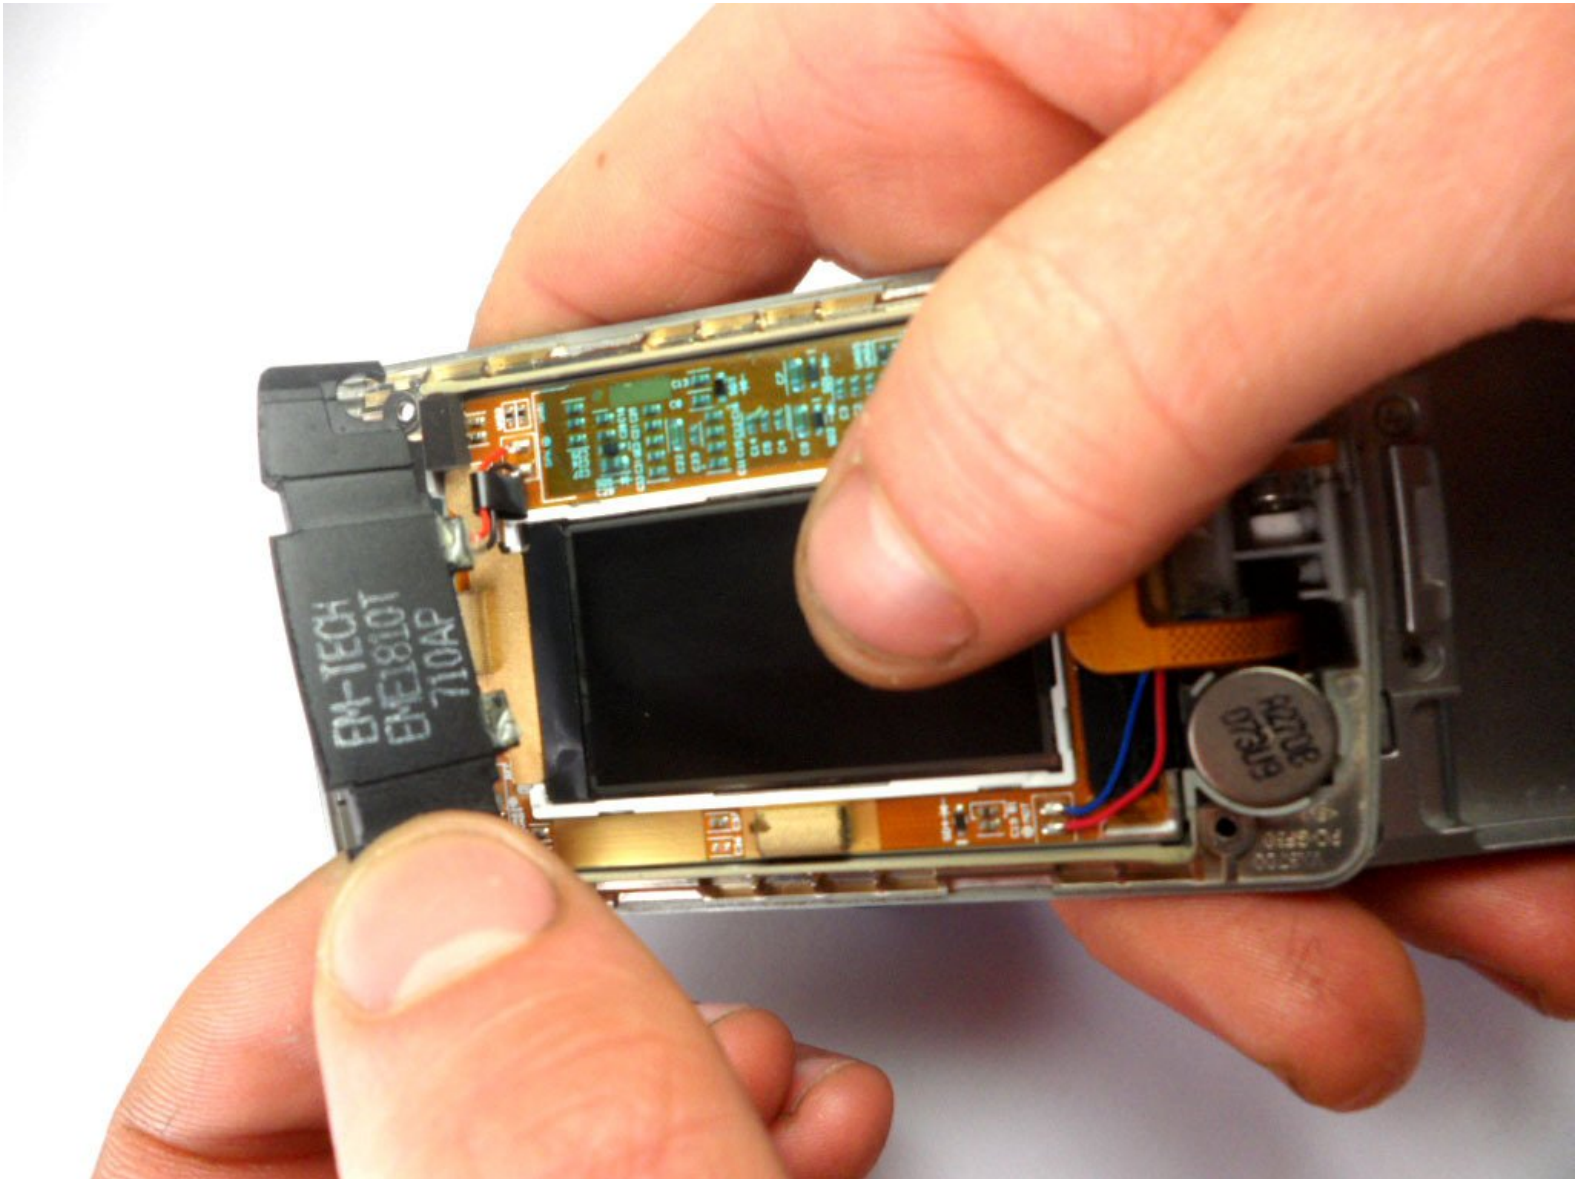

## TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [Soldering Workstation](#) (1)
- [iFixit Opening Tool](#) (1)

## Step 1 — Battery

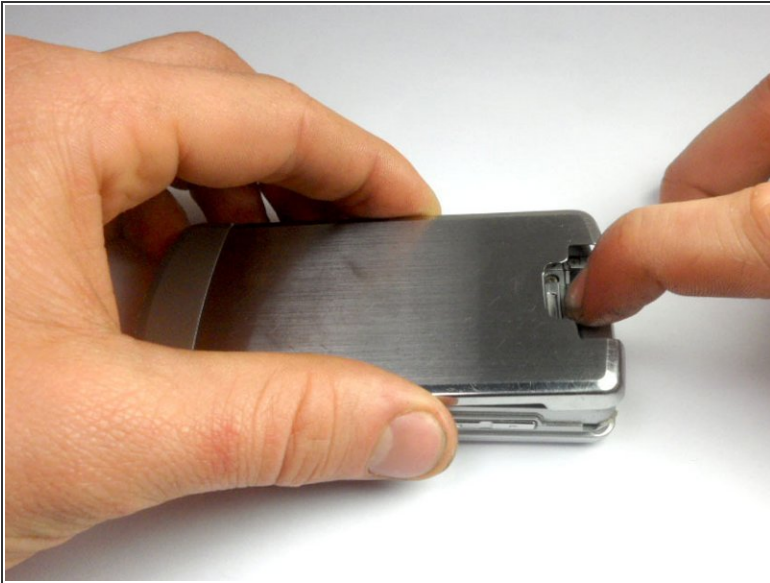

 **Make sure the phone is completely off.**

- Remove the back cover by sliding the tab away from the phone using one finger.

## Step 2



- Lift one side of the battery using a plastic opening tool or your fingers.
- Carefully remove the battery and set it aside.
- ☑ When installing the new battery, make sure to align the metal pins with those of the phone.


## Step 3 — Front Bezel



- Turn your phone around and open the flip phone.
- Locate the two grey rubber plugs on the LCD portion of the phone. These plugs cover up two screws.
- Remove the two grey screw-covers at the bottom of the screen



## Step 4

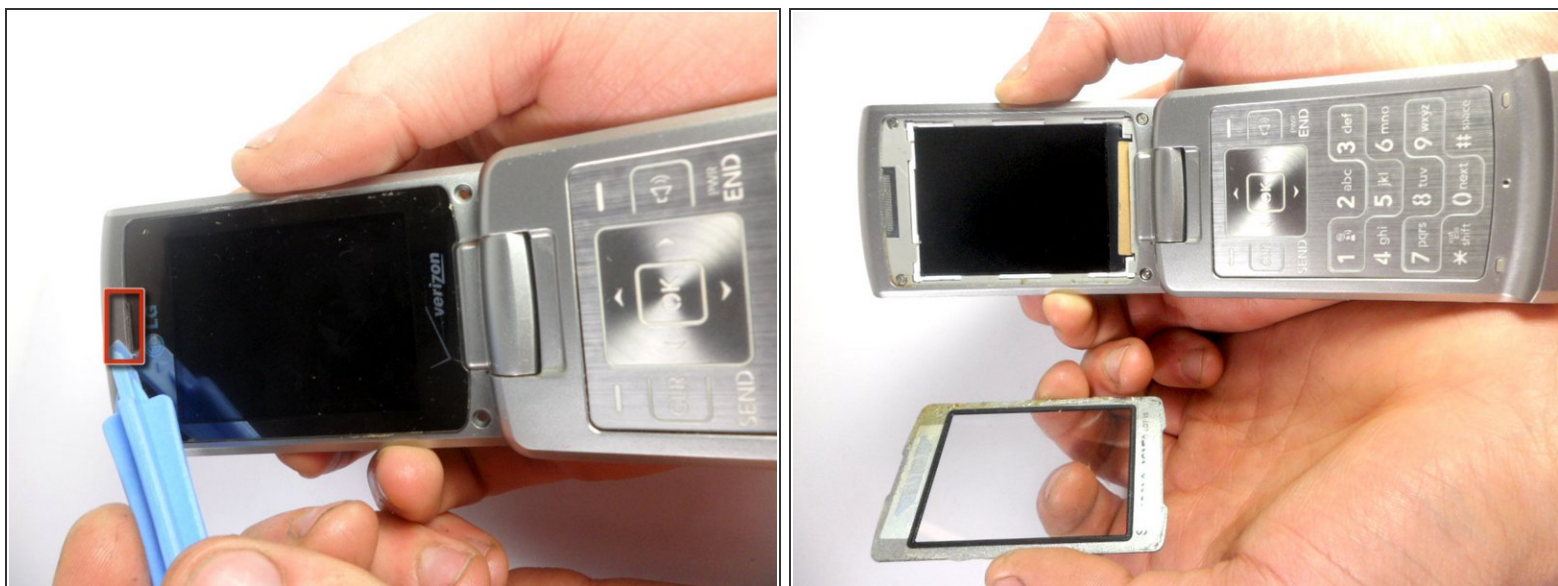


- Remove the screen by using the tab to eject the screen.
  - There is a gap between the case and the screen near the ear piece
  - Insert the plastic opening tool in the gap and pry the screen up.
- ⓘ The plastic screen cover is glued onto the phone, do not be alarmed if it may be difficult to pry it off.

## Step 5




- Unscrew the four corner 3.21mm screws to separate the the top cover of the phone

## Step 6

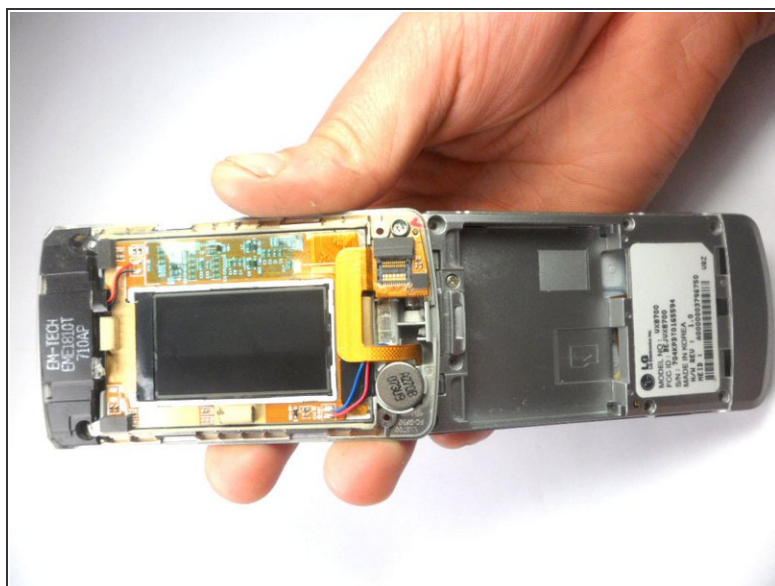



- Turn your phone around
- Remove the top cover of the phone by inserting the plastic opening tool into the groove.
- Carefully open the cover.

## Step 7 — Ear Piece

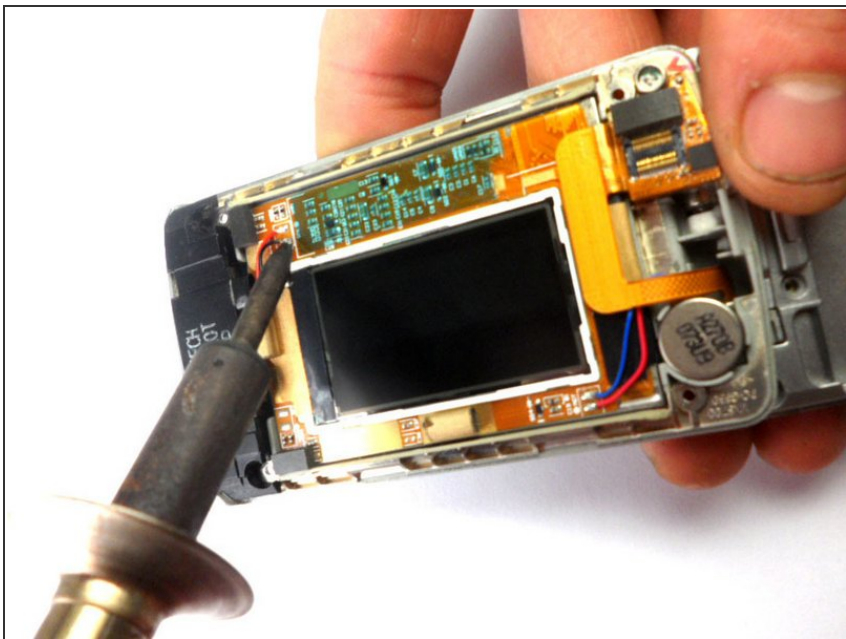

- Desolder the top ear piece using a soldering iron to remove the component
- The ear piece is the black component that is located at the top with black and red wires

## Step 8

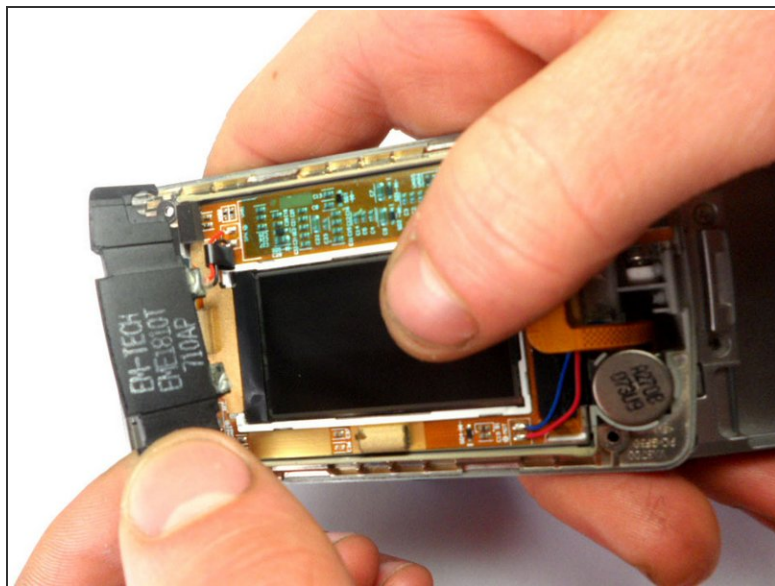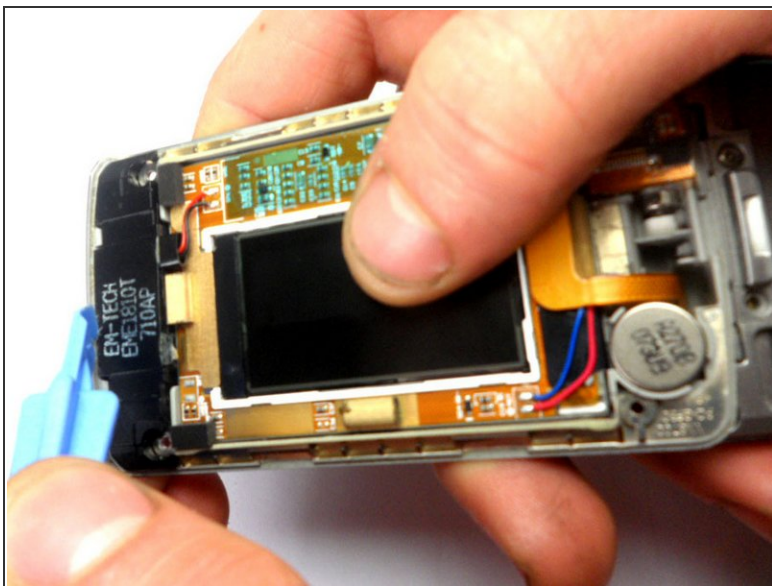

- Remove the ear piece from the phone by lifting it using a plastic opening tool.

To reassemble your device, follow these instructions in reverse order.