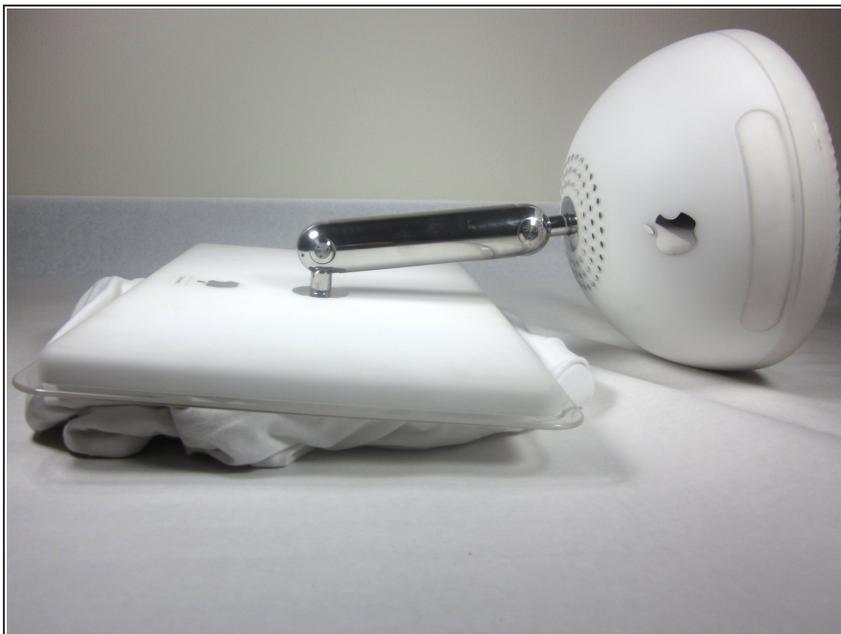

INTRODUCTION

Remove all electrical wires from the computer, and lay the computer flat on its screen. The computer should rest on a smooth, padded surface.

TOOLS:

- [captive screw](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Bottom Plate



- Unplug all the cables from the computer, including the power cable. Lay the computer face-down, supporting the neck and base with a soft cloth under the screen.

Step 2



- Loosen the four Phillips #0 screws.

Step 3



- Carefully remove the base access panel.

To reassemble your device, follow these instructions in reverse order.